



Terminal Setup

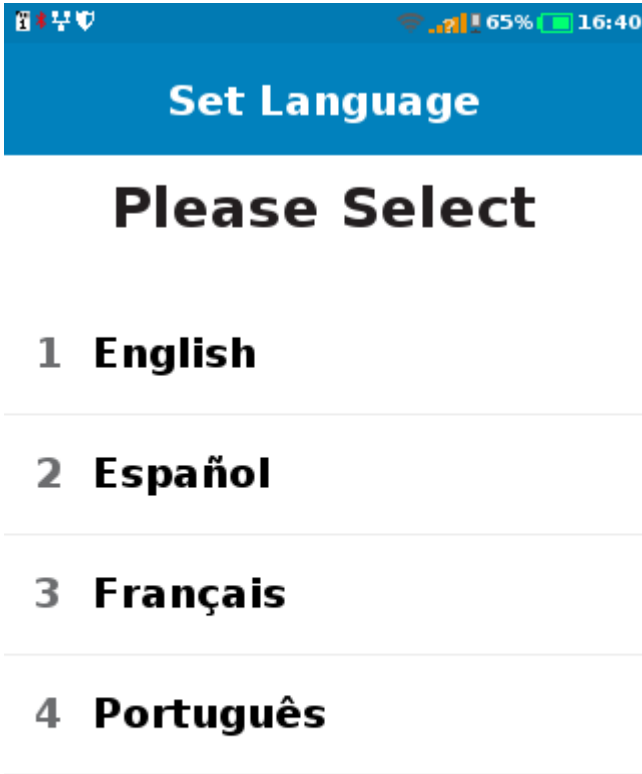

This section will allow you to activate your Verifone terminal. Please follow the instructions carefully.

Step	Instruction	Screen Information	Rebranded Screen Information
1	Connect the power to the terminal. When first powered on, the terminal will start up and after a short while, this screen will be displayed. Select the language to continue.		

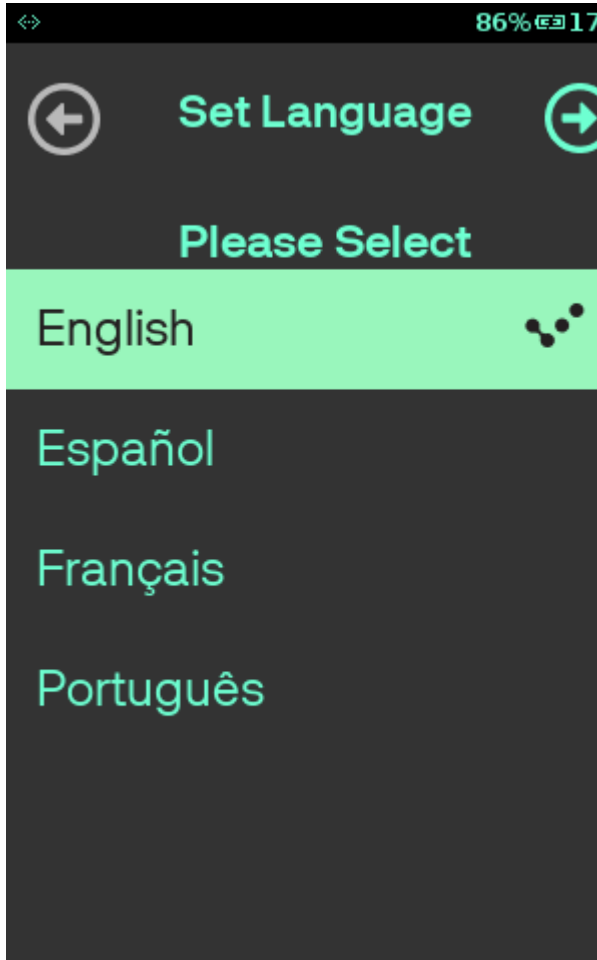

Step Instruction

Screen Information



Rebranded Screen Information

Terminal prompts for setting the timezone. Use  and  to navigate pages.

Search or Navigate to set the timezone.

If  key is pressed, proceed to the next step by selecting first time zone in menu. If  key is pressed, proceed to the next step by selecting existing timezone.

2

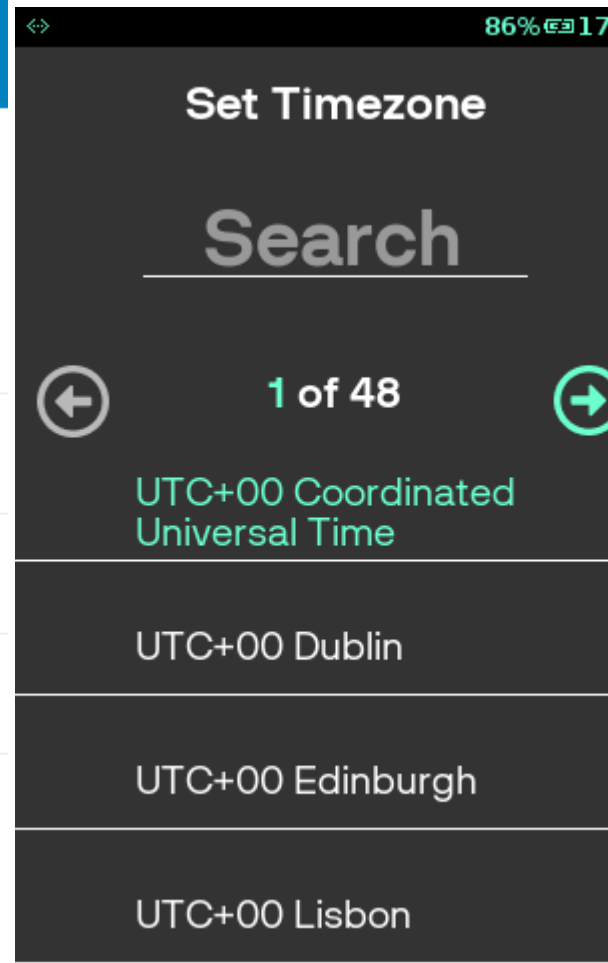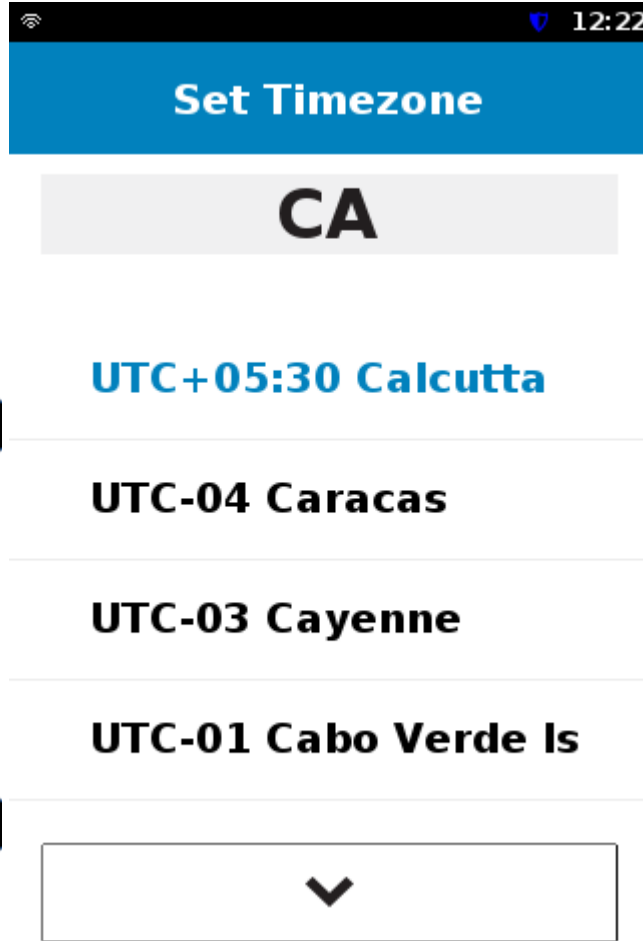



Step Instruction

Screen Information

Rebranded Screen Information

3

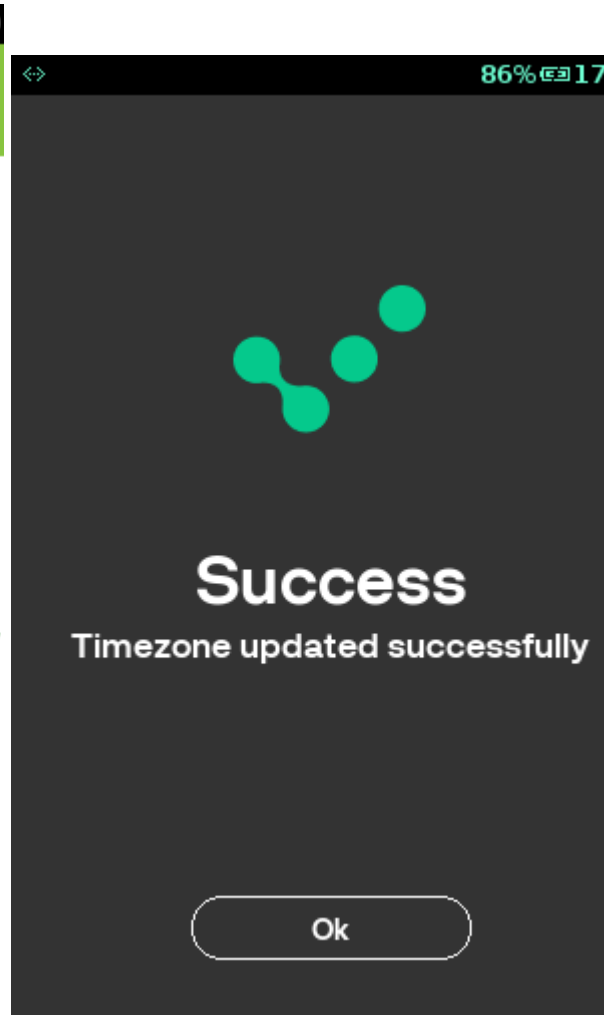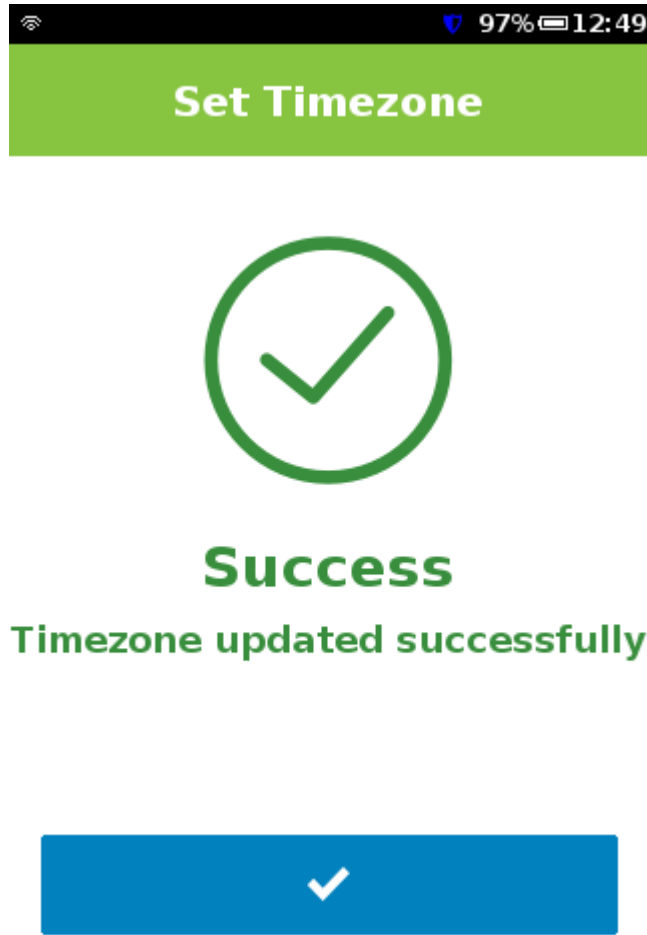

Message is displayed informing about successful setting up of timezone.




Step Instruction

Screen Information

Rebranded Screen Information

Terminal prompts for setting the date.
Press  key to set the date and proceed to step 6.
4
Press  to skip setting the date and proceed to step 7.

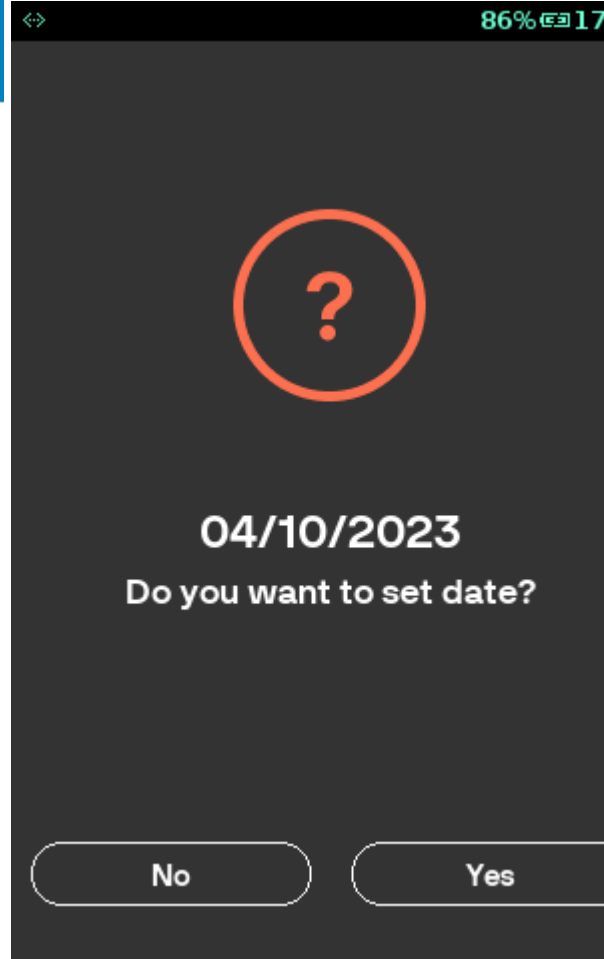

Step Instruction

Screen Information



DD/MM/YYYY



Rebranded Screen Information




DD/MM/YYYY



Cancel

Ok


5

Set the correct date and press  key to continue.


Step Instruction

Screen Information


Rebranded Screen Information

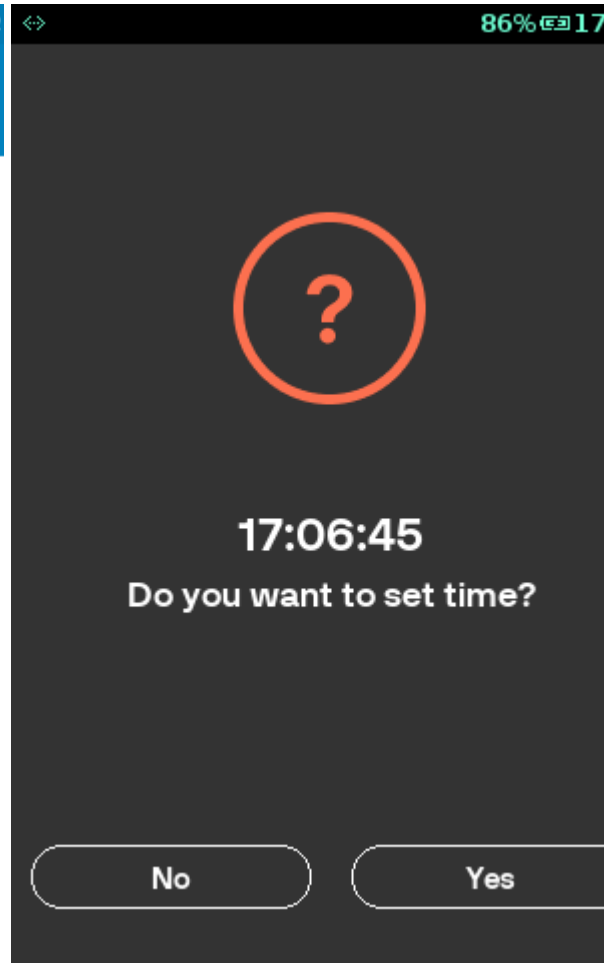

Terminal prompts for setting the time.

Press  key to set the time.


6

Press  to skip setting the time and proceed to step 10.



16:52:24

Do you want to set time?



Step Instruction


Screen Information




HH:MM:SS



Rebranded Screen Information

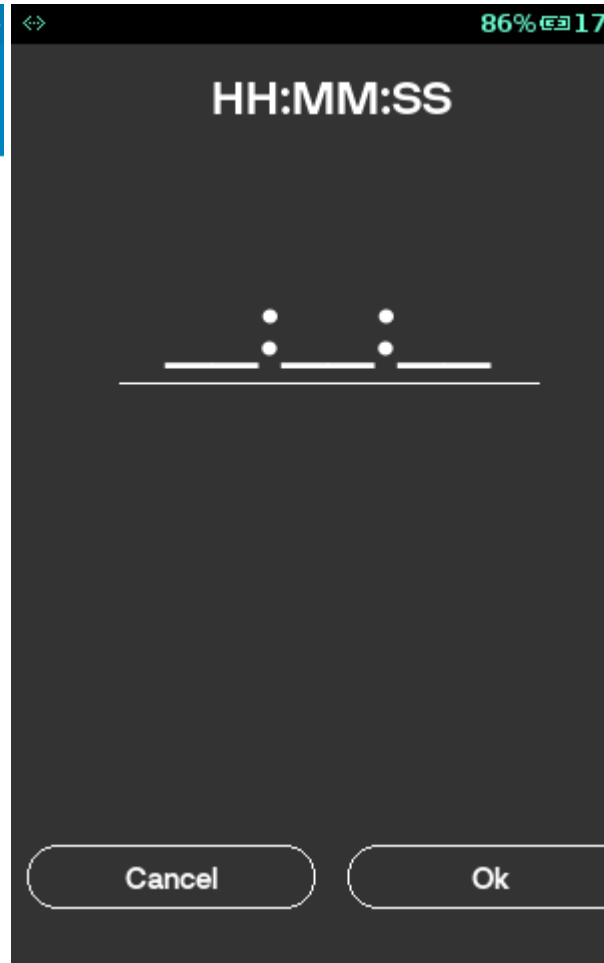

7

Set the correct time and press  key to continue.


Step Instruction

Screen Information

Rebranded Screen Information

8


The message is displayed informing about successful setting up of date and/or time.

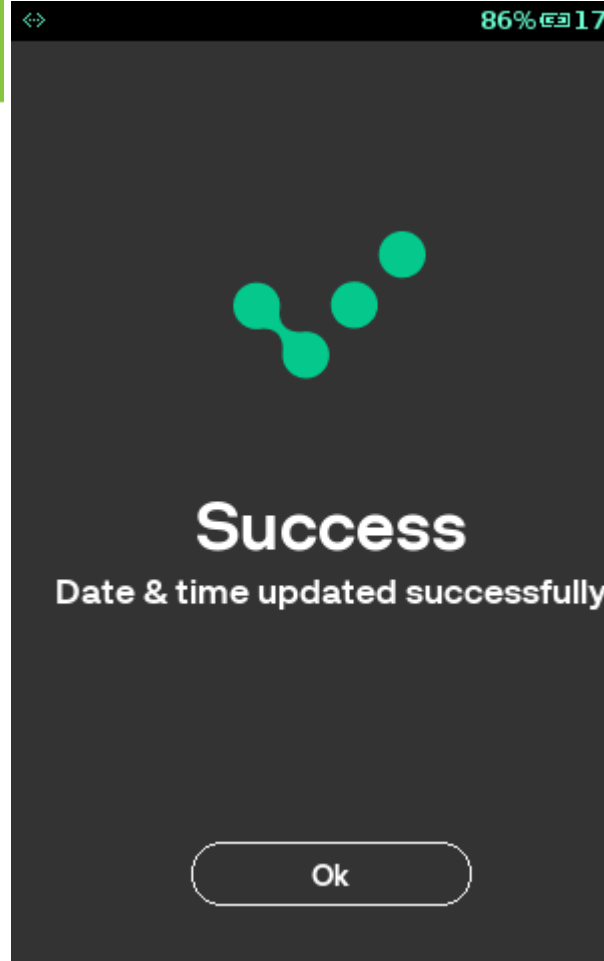

Step Instruction

Screen Information

Rebranded Screen Information

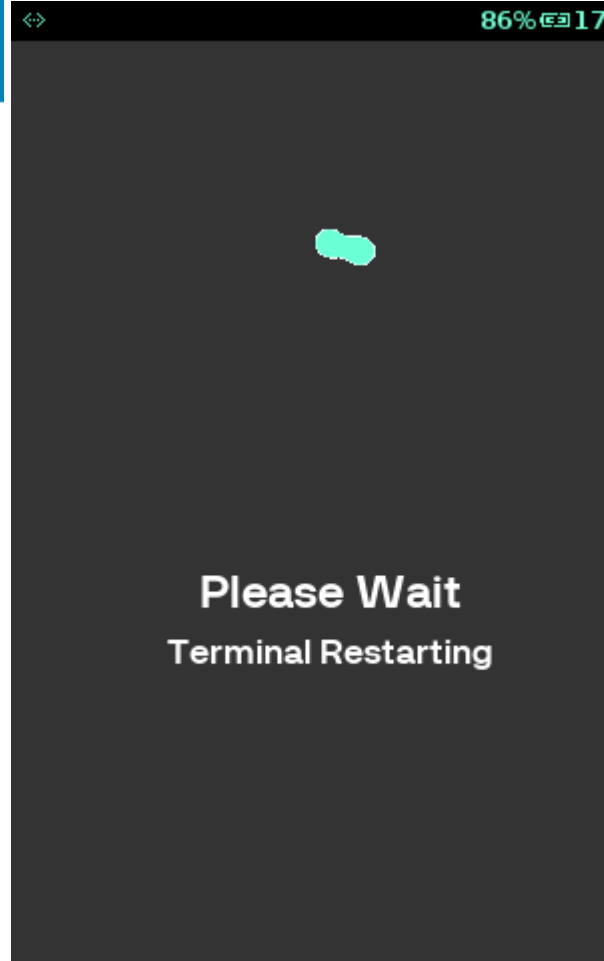

9 Terminal reboot is required to update timezone for vha agent.


Please Wait
Terminal Restarting

Please Wait
Terminal Restarting

Step Instruction

Screen Information

Rebranded Screen Information

Terminal prompts for selecting the communication setting through communication wizard or ADV communication.

Press 


to do communication setting through ADV communication proceed with step 12 and skip step 11. Press



to do communication setting through communication wizard with step 11 and skip step 12.



**ADV
Communication
required?**


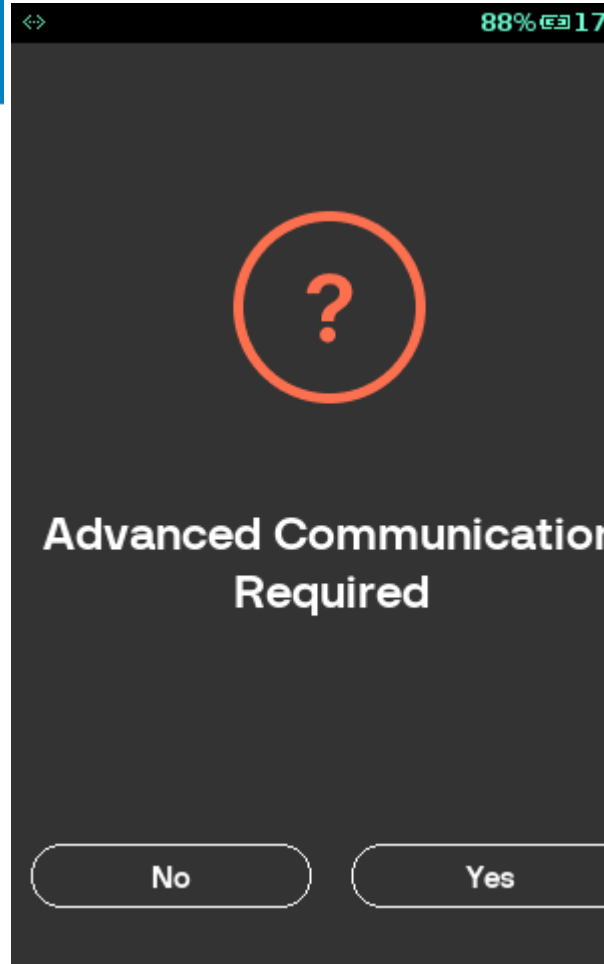


Step Instruction

Screen Information

Rebranded Screen Information

11 Configure the communication medium through communication wizard. For more information, refer to [Setting Connection](#)

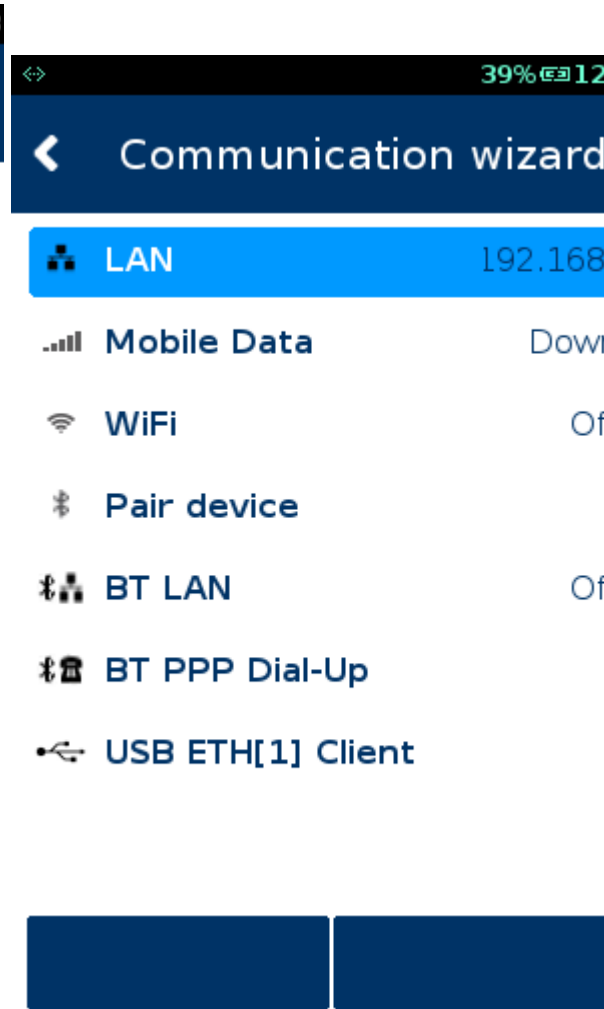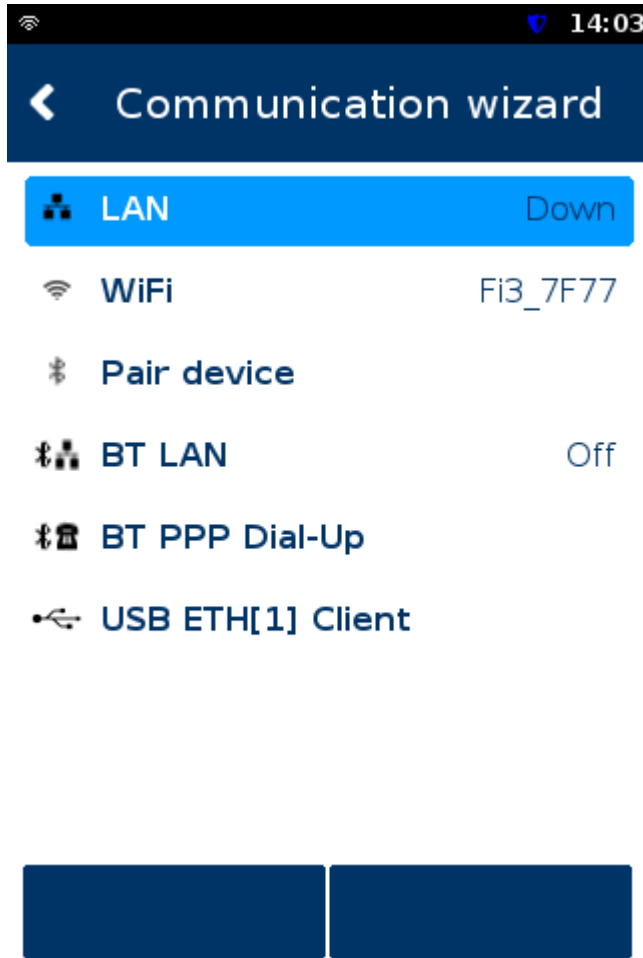



Step Instruction

Screen Information

Rebranded Screen Information

12


Configure the communication medium. For more information, refer to [Setting Connection](#)

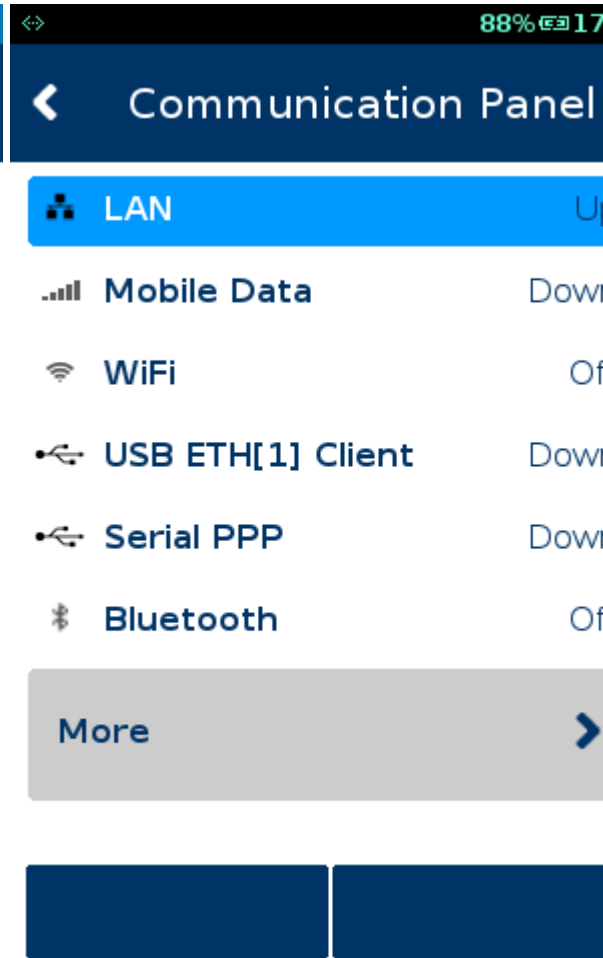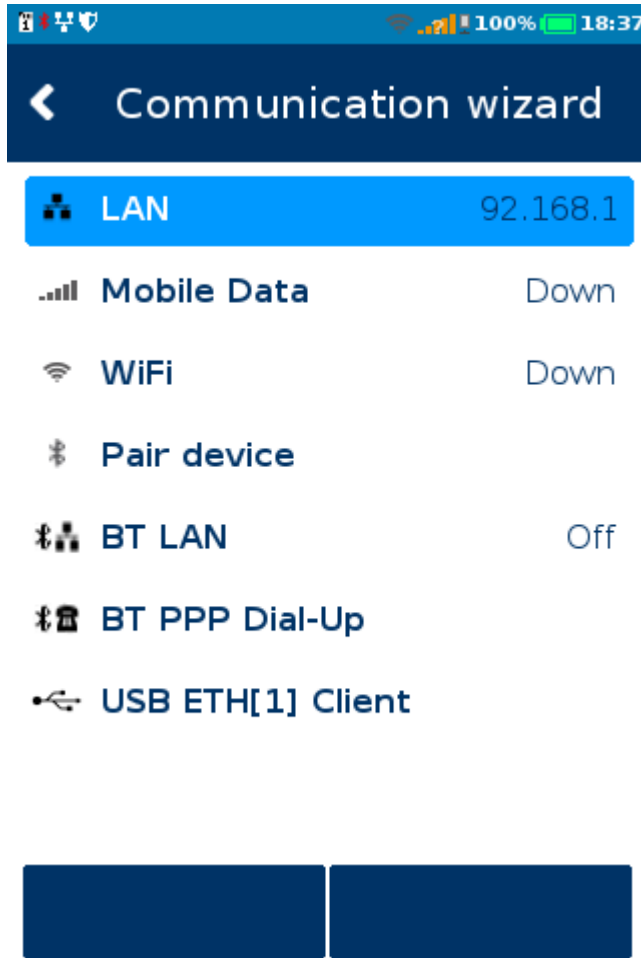


Step Instruction


Screen Information

Rebranded Screen Information

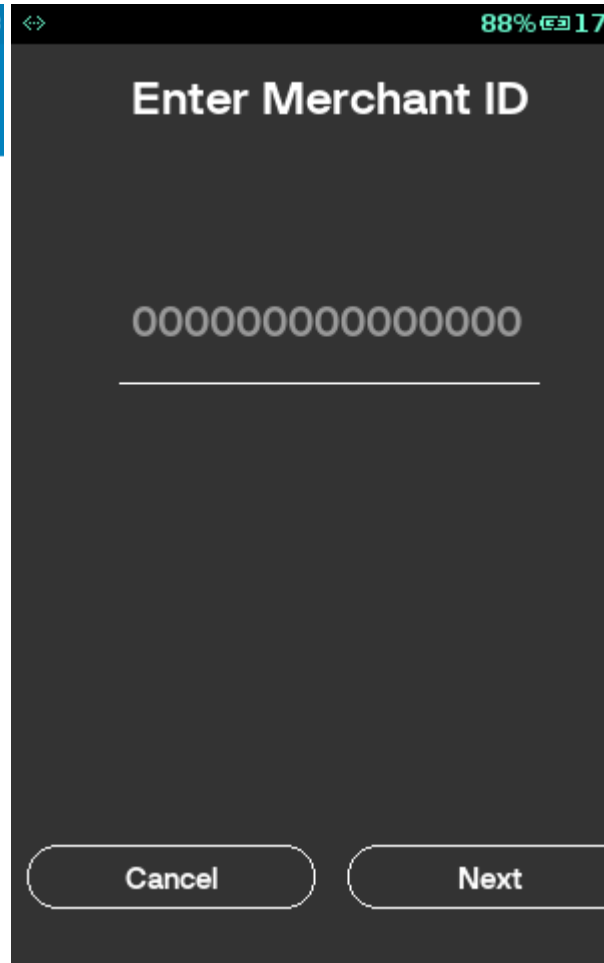

13


Enter Your MID (Merchant ID number) that was sent to you in your Welcome letter and press  key to continue.

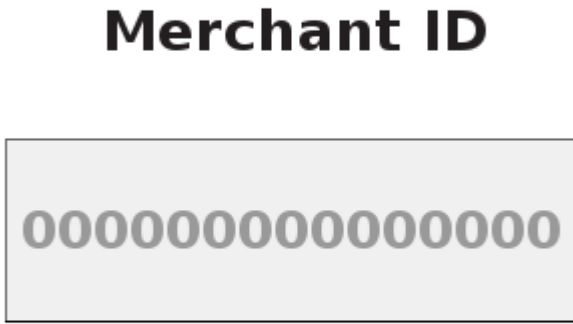


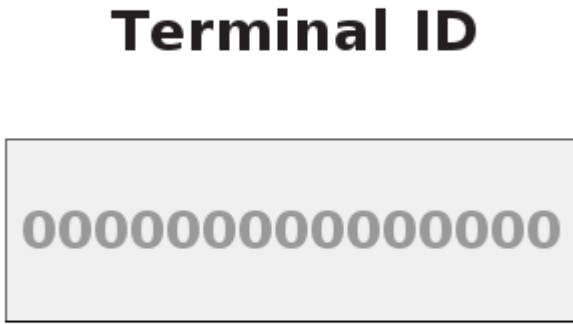
Step Instruction

Screen Information

Rebranded Screen Information

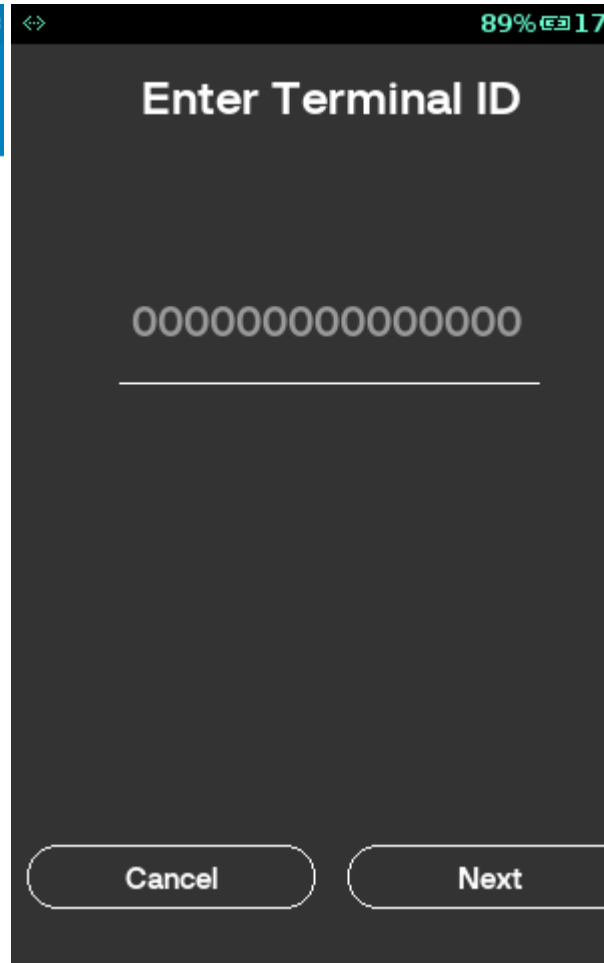

14 Enter Your TID (Terminal ID number) that was sent to you in your Welcome letter and press  key to continue.




Step Instruction

Screen Information


Rebranded Screen Information




Please Wait
Checking For Updates...

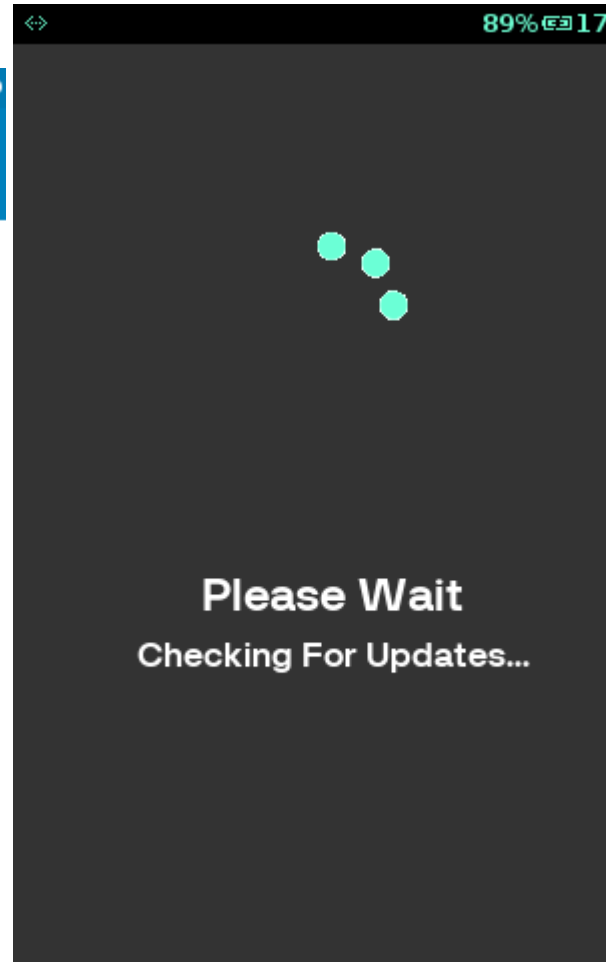


Please Wait
Downloading Updates...

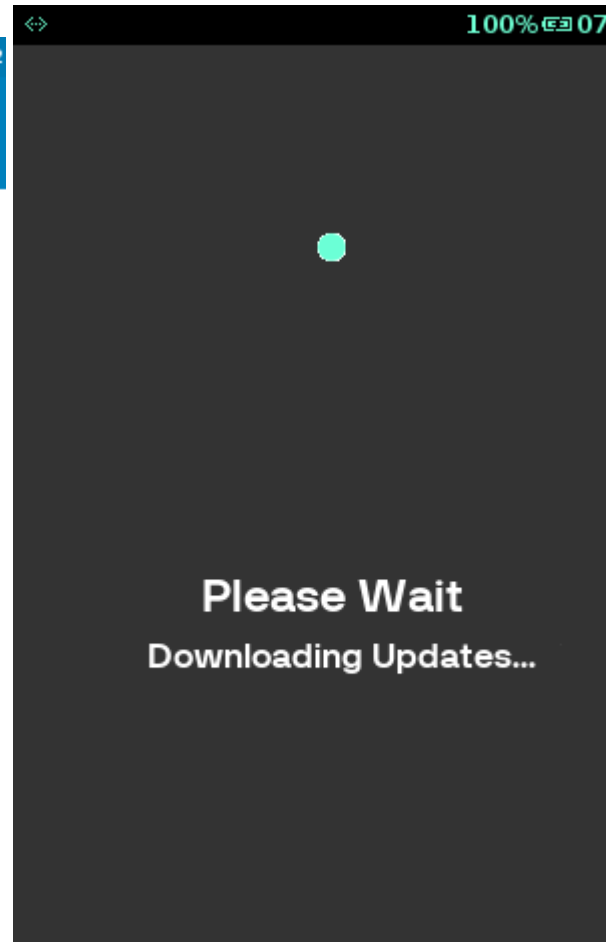

Step Instruction

Screen Information



16

Once the updates are installed, it will show the successful message.

Rebranded Screen Information



Step Instruction

Screen Information

Rebranded Screen Information

17 You will then be presented with the idle screen. The terminal is now ready to perform transactions.

