
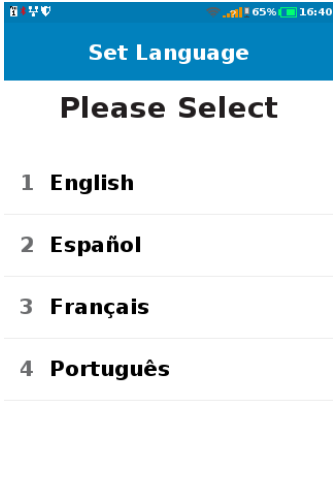
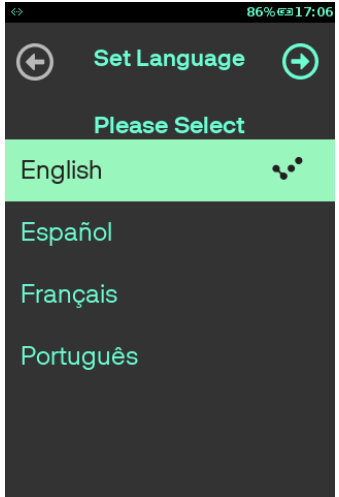



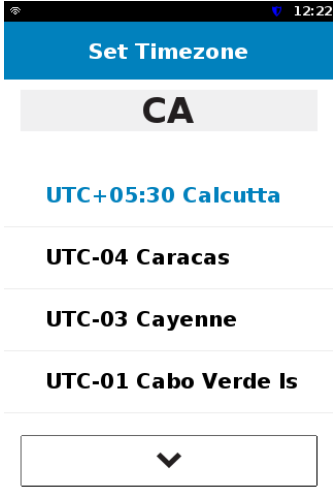
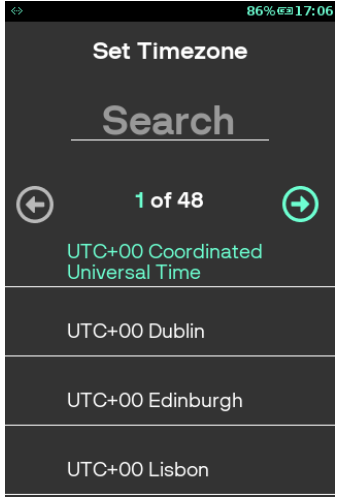
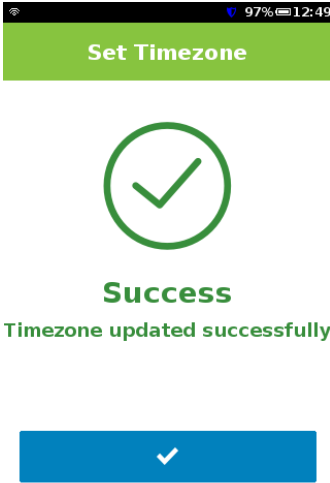
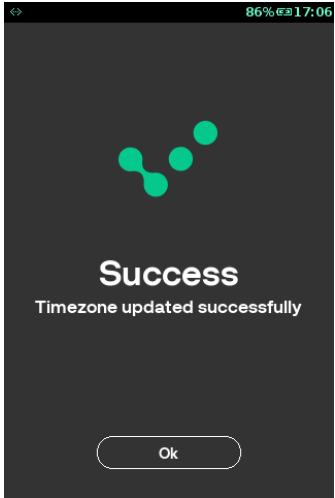



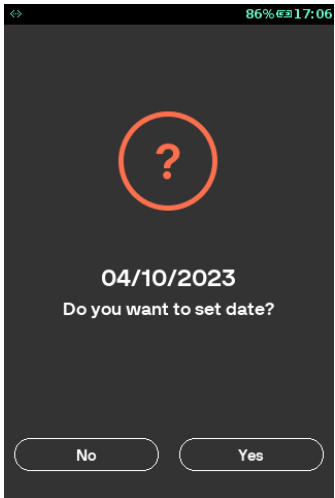





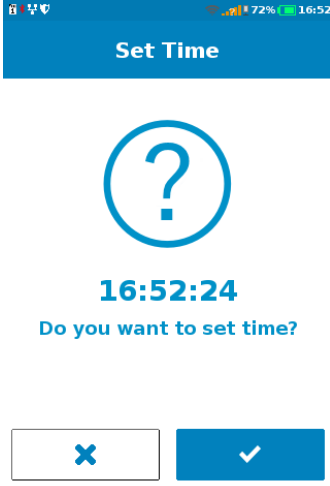
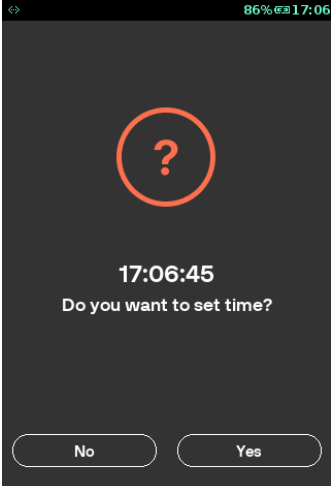



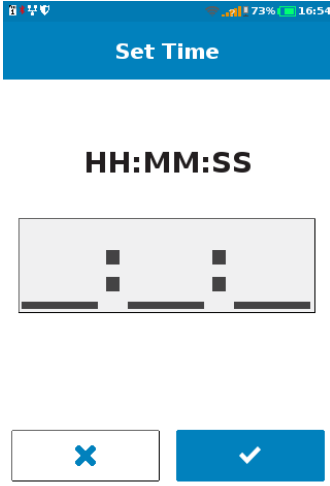
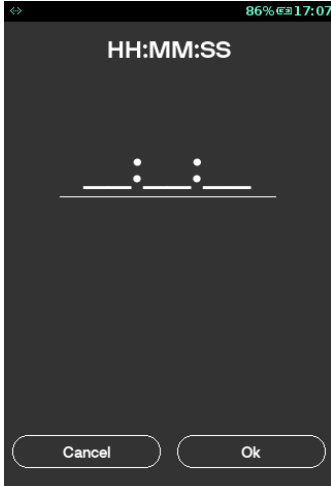

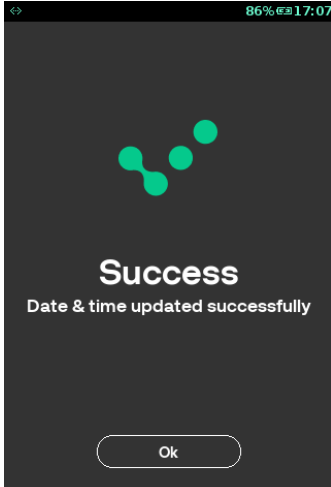
Terminal Setup






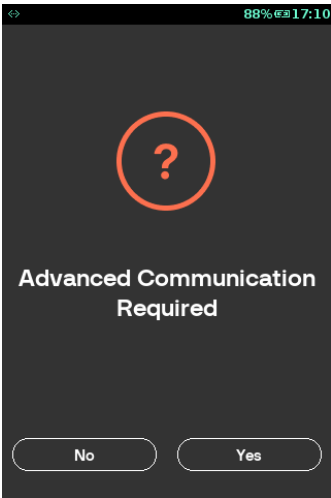
This section will allow you to activate your Verifone terminal. Please follow the instructions carefully.





Step	Instruction	Screen Information	Rebranded Screen Information
1	<p>Connect the power to the terminal. When first powered on, the terminal will start up and after a short while, this screen will be displayed. Select the language to continue.</p>		
2	<p>Terminal prompts for setting the timezone. Use  and  to navigate pages.</p> <p>Search or Navigate to set the timezone</p> <p>If  key is pressed, proceed to the next step by selecting first time zone in menu.</p> <p>If  key is pressed, proceed to the next step by selecting existing timezone.</p>		


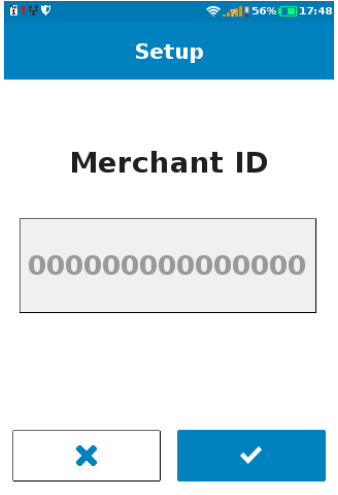
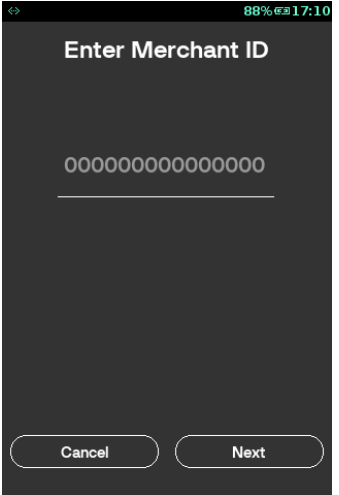

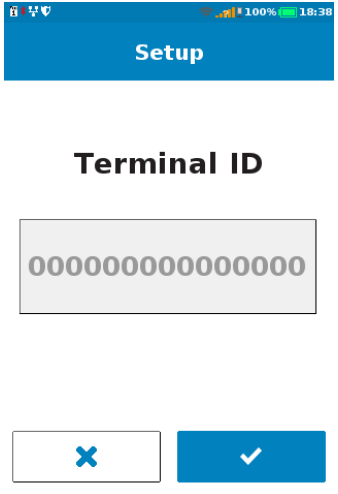
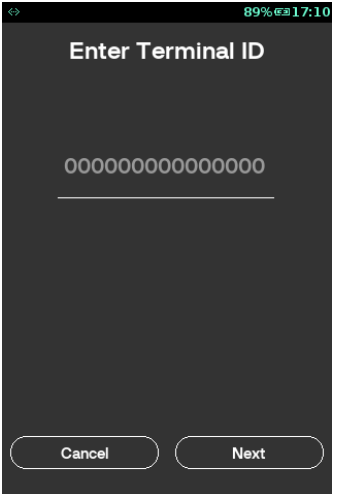
Step	Instruction	Screen Information	Rebranded Screen Information
3	<p>Message is displayed informing about successful setting up of timezone.</p>		
4	<p>Terminal prompts for setting the date. Press  key to set the date and proceed to step 6.</p> <p>Press  to skip setting the date and proceed to step 7.</p>		

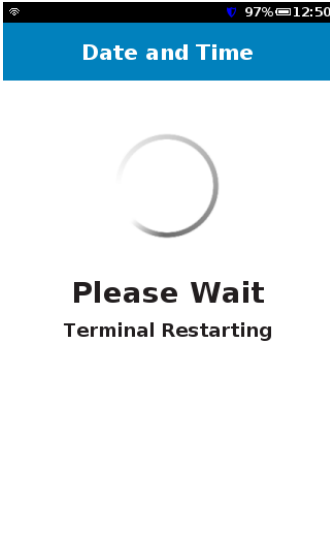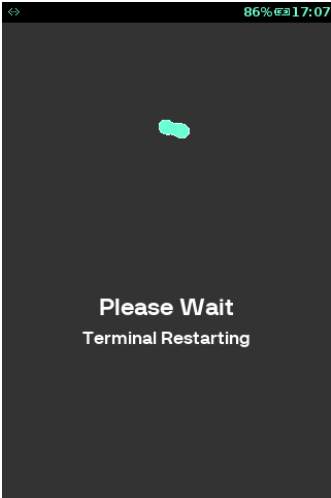





Step	Instruction	Screen Information	Rebranded Screen Information
5	Set the correct date and press  key to continue.		
6	Terminal prompts for setting the time. Press  key to set the time. Press  to skip setting the time and proceed to step 10.		

Step	Instruction	Screen Information	Rebranded Screen Information
7	Set the correct time and press  key to continue.	 <p>The screenshot shows a blue header with 'Set Time'. Below it is a digital clock display 'HH:MM:SS' and a numeric keypad. At the bottom, there are two buttons: a white 'X' button and a blue checkmark button.</p>	 <p>The rebranded screen has a dark background with 'HH:MM:SS' at the top. It features a numeric keypad and two buttons at the bottom: 'Cancel' and 'Ok'.</p>
8	The message is displayed informing about successful setting up of date and/or time.	 <p>The screenshot shows a green header with 'Date and Time'. Below it is a large green checkmark icon, the word 'Success' in green, and the text 'Date & time updated successfully'. At the bottom is a blue button with a white checkmark.</p>	 <p>The rebranded screen has a dark background with the Verifone logo at the top, the word 'Success' in white, and the text 'Date & time updated successfully'. At the bottom is a white button with 'Ok'.</p>

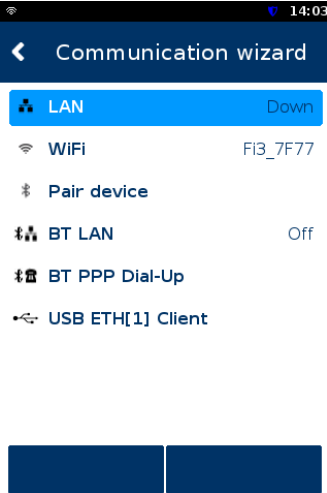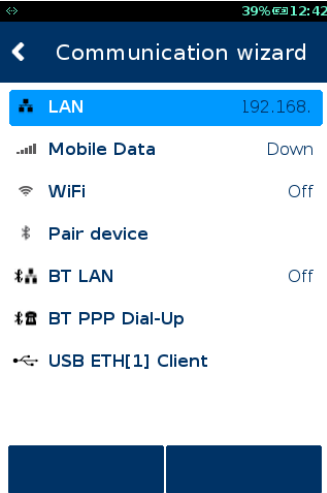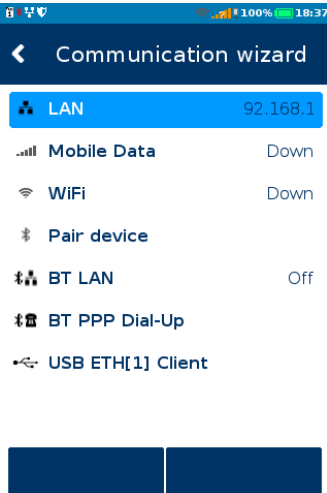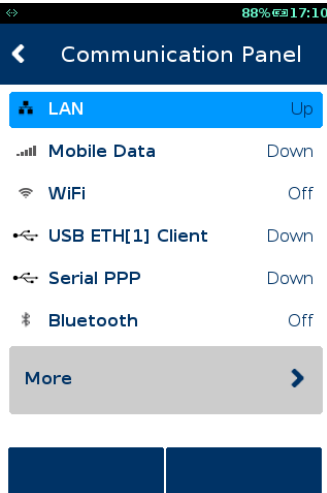Step	Instruction	Screen Information	Rebranded Screen Information
9	<p>Terminal reboot is required to update timezone for vhf agent.</p>		
10	<p>Terminal prompts for selecting the communication setting through communication wizard or ADV communication.</p> <p>Press  to do communication setting through ADV communication proceed with step 12 and skip step 11.</p> <p>Press  to do communication setting through communication wizard with step 11 and skip step 12.</p>		

Step	Instruction	Screen Information	Rebranded Screen Information
11	Configure the communication medium through communication wizard. For more information, refer to Setting Connection		
12	Configure the communication medium. For more information, refer to Setting Connection		

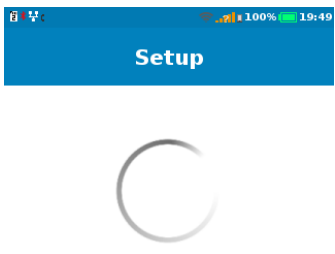Step	Instruction	Screen Information	Rebranded Screen Information
13	Enter Your MID (Merchant ID number) that was sent to you in your Welcome letter and press  key to continue.		
14	Enter Your TID (Terminal ID number) that was sent to you in your Welcome letter and press  key to continue.		

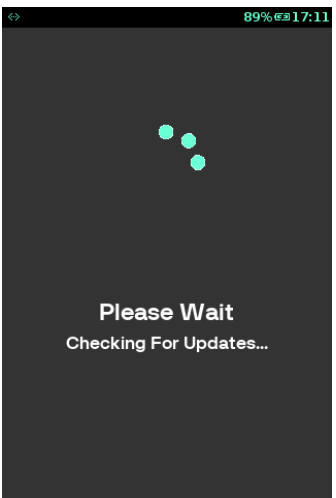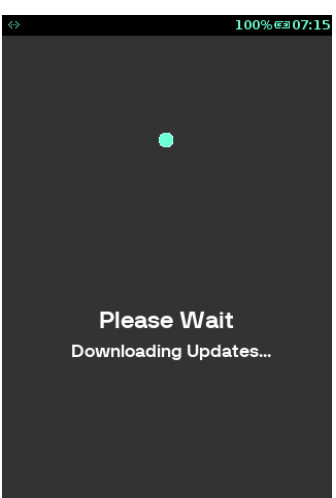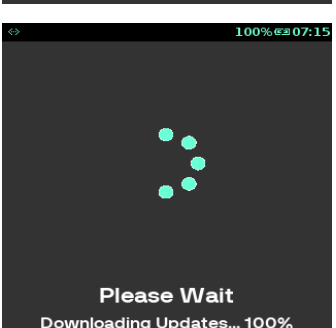

Step	Instruction	Screen Information	Rebranded Screen Information
15	The terminal will now download any available updates from the Terminal Management System.	  	  

[https://verifone.cloud/docs/in-person-payments/global-payment-application-gpa/gpa-intercard-user-guide/terminal-](https://verifone.cloud/docs/in-person-payments/global-payment-application-gpa/gpa-intercard-user-guide/terminal-setup)

setup

Updated: 25-Oct-2023



Step	Instruction	Screen Information	Rebranded Screen Information
16	Once the updates are installed, it will show the successful message.		
17	You will then be presented with the idle screen. The terminal is now ready to perform transactions.	