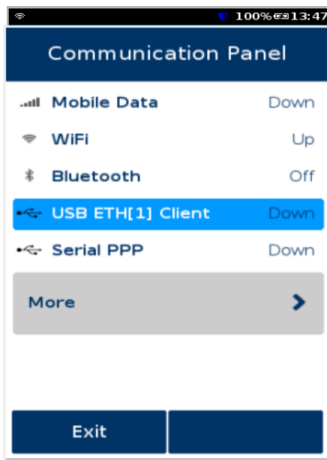
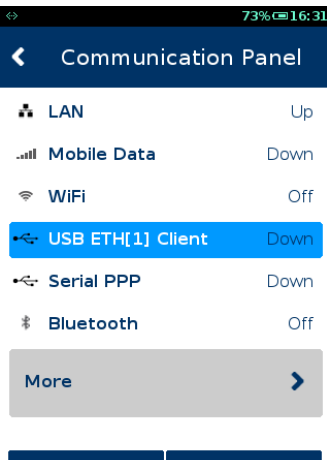
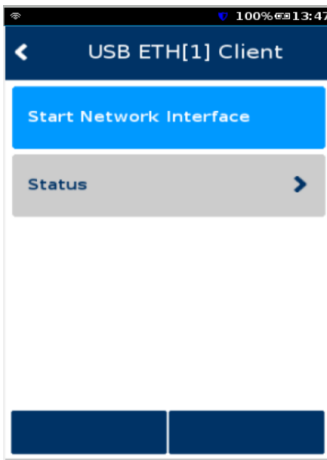
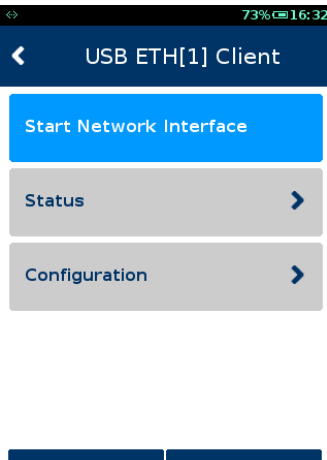
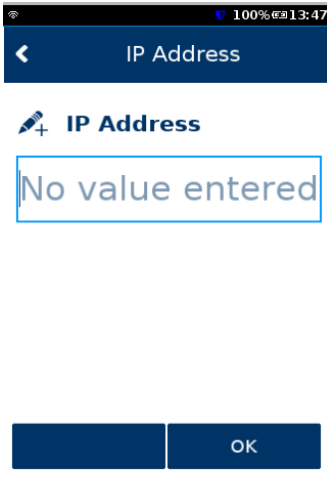
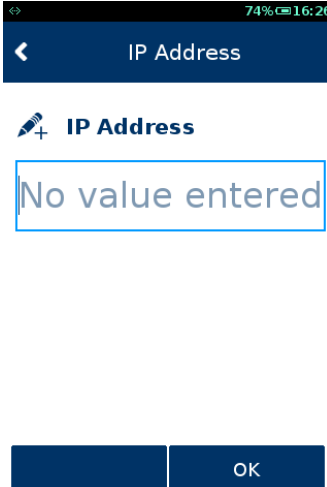

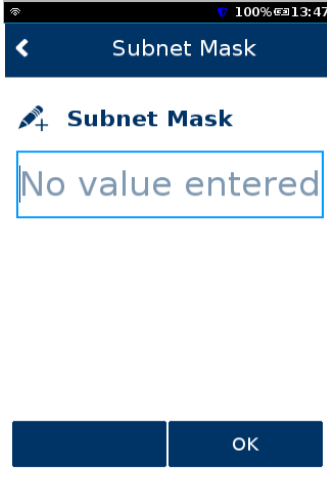
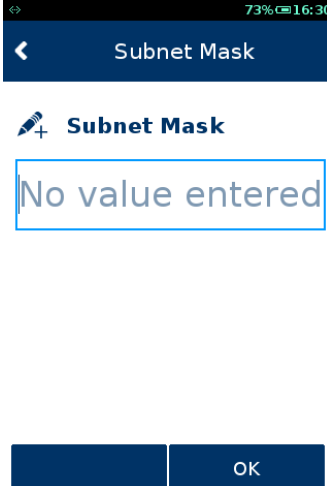





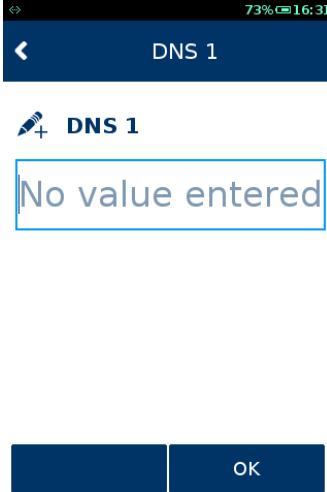


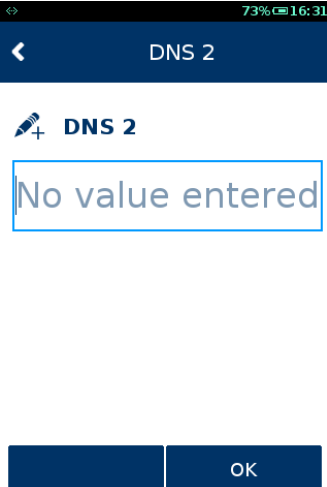

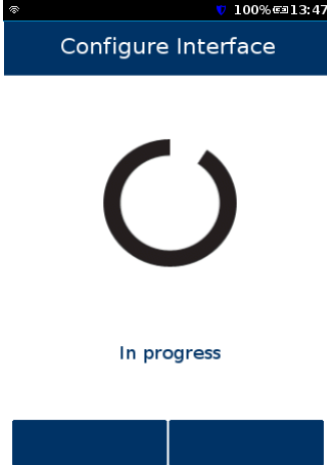
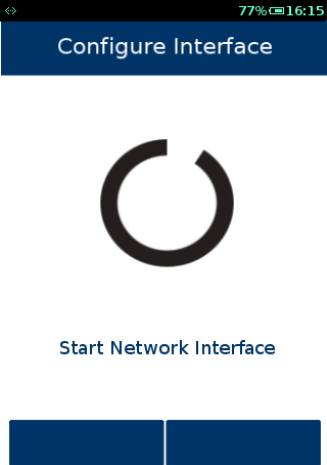


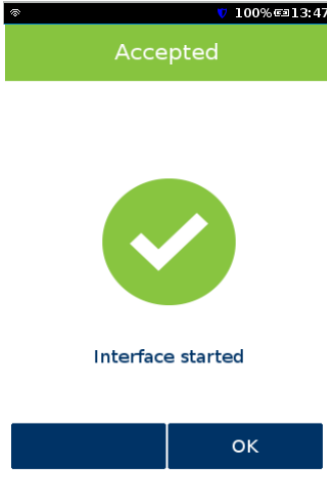
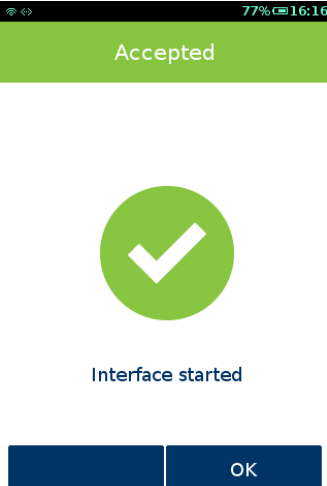
IP over USB

Step	Screen Information	Rebranded Screen Information	Instruction
1			<p>Select USB ETH(1) Client. The terminal proceeds to the next step.</p>
2			<ul style="list-style-type: none"> • Select Start Network Interface to set up a connection. Proceeds to next step. • Select Status to check the existing network status.

Step	Screen Information	Rebranded Screen Information	Instruction
3	 <p>100% 13:47</p> <p>IP Address</p> <p>IP Address</p> <p>No value entered</p> <p>OK</p>	 <p>74% 16:26</p> <p>IP Address</p> <p>IP Address</p> <p>No value entered</p> <p>OK</p>	<p>Enter network IP address and press  key.</p> <p>Proceed to the next step.</p> <ul style="list-style-type: none"> • If timeout happens, goes back to step 2.
4	 <p>100% 13:47</p> <p>Subnet Mask</p> <p>Subnet Mask</p> <p>No value entered</p> <p>OK</p>	 <p>73% 16:30</p> <p>Subnet Mask</p> <p>Subnet Mask</p> <p>No value entered</p> <p>OK</p>	<p>Enter subnet mask value and press  key.</p> <p>Proceed to the next step.</p> <ul style="list-style-type: none"> • If timeout happens, goes back to step 2.

Step	Screen Information	Rebranded Screen Information	Instruction
5	 <p>100% 13:47</p> <p>← Gateway IP Address</p> <p>+ Gateway IP Address</p> <p>No value entered</p> <p>OK</p>	 <p>73% 16:31</p> <p>← Gateway IP Address</p> <p>+ Gateway IP Address</p> <p>No value entered</p> <p>OK</p>	<p>Enter gateway IP address and press  key.</p> <p>Proceed to the next step.</p> <ul style="list-style-type: none"> • If timeout happens, goes back to step 2.
6	 <p>100% 13:47</p> <p>← DNS 1</p> <p>+ DNS 1</p> <p>No value entered</p> <p>OK</p>	 <p>73% 16:31</p> <p>← DNS 1</p> <p>+ DNS 1</p> <p>No value entered</p> <p>OK</p>	<p>Enter primary DNS value and press  key.</p> <p>Proceed to the next step.</p> <ul style="list-style-type: none"> • If timeout happens, goes back to step 2.

Step	Screen Information	Rebranded Screen Information	Instruction
7			<p>Enter secondary DNS value and press  key. The terminal goes back to 2.</p> <ul style="list-style-type: none"> • If timeout happens, goes back to step 2.
8			<p>The terminal tries to configure interface selected.</p>

Step	Screen Information	Rebranded Screen Information	Instruction
9			<p>User timeout or press key.</p> 