



Archive Class Reference

Inheritance diagram for Archive:

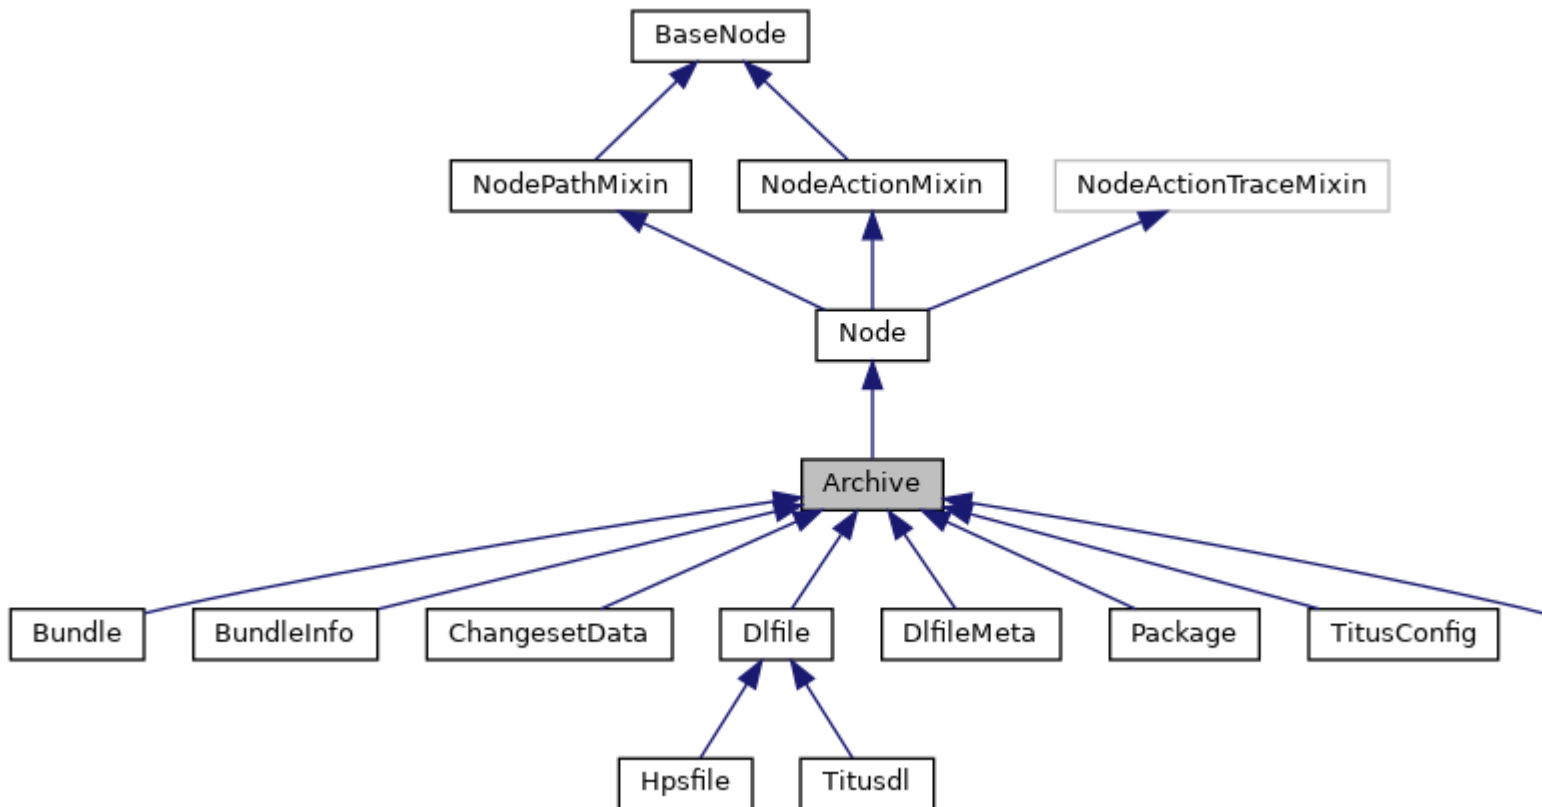

[\[legend\]](#)

Collaboration diagram for Archive:

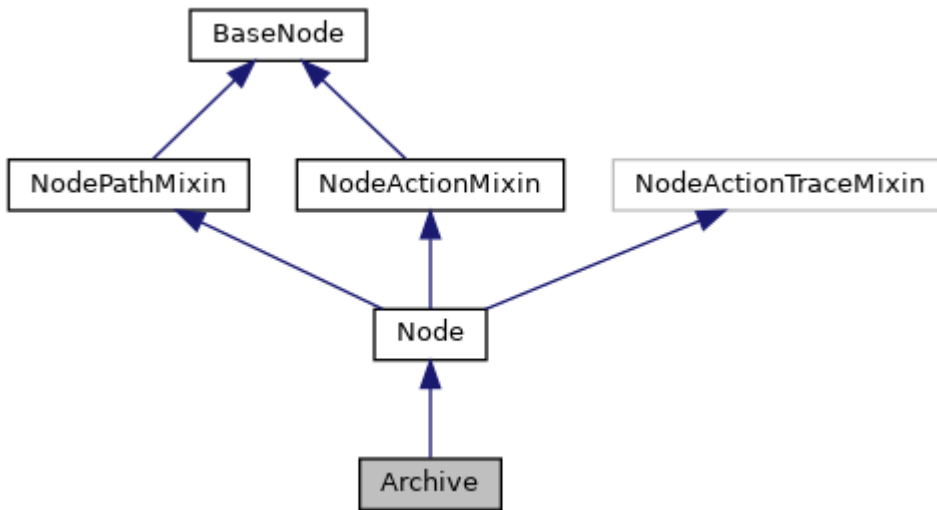

[\[legend\]](#)

Public Member Functions

def [__init__](#) (self, [platform](#))

def [control_node](#) (self)

def [control](#) (self)

bool [set_signer](#) (self, signer_type, args=None)

► Public Member Functions inherited from [Node](#)

def [__init__](#) (self, [name](#)=None, [parent](#)=None, [tarinfo](#)=None)

► Public Member Functions inherited from [NodePathMixin](#)

def [get_path_nodes](#) (self, include_root=False, within_archive=False)

str [get_path](#) (self, include_root=False, within_archive=False)

Retrieve path of this node within the archive or withing whole tree of archives Separator '/' is used within archives and for recursion into archives. [More...](#)

int [get_depth](#) (self, within_archive=False)

Retrieve depth of node within the archive or within whole tree of archives. [More...](#)

def [find](#) (self, str node_path)

Find node according to node path provided. [More...](#)

def [find_re](#) (self, str node_path_re)

Find node according to regular expression node path provided Search will look for regex matching node name match along the path. [More...](#)

bool [has_ancestor](#) (self, ancestor)

Find if node has another node as ancestor. [More...](#)

bool [has_ancestor_name](#) (self, ancestor_name)

Find if node has an ancestor with provided name (or in list of names) [More...](#)

► Public Member Functions inherited from [BaseNode](#)

def [__init__](#) (self, str [name](#)=None, [BaseNode](#) [parent](#)=None, tarfile.TarInfo [tarinfo](#)=None)

str [get_type_str](#) (self)

Returns node type as string Supported are: "Package", "Bundle", "Dlfile", "Signature", "Control", "Manifest", "Dir", "File", "Symlink". [More...](#)

bool [is_csd](#) (self)

Test if node is a CSD. [More...](#)

bool [is_inf](#) (self)

Test if node is an INF. [More...](#)

bool [is_meta](#) (self)

Test if node is a META. [More...](#)

bool [is_manifest](#) (self)

Test if node is a manifest. [More...](#)

bool [is_titus_manifest](#) (self)

Test if node is a titus manifest. [More...](#)

bool [is_changeset](#) (self)

Test if node is a changeset. [More...](#)

bool [is_archive](#) (self)

Test if node is an archive. [More...](#)

bool [is_dlfile](#) (self)

Test if node is a dlfile. [More...](#)

bool [is_titusdl](#) (self)

Test if node is a titusdl. [More...](#)

bool [is_titusconfig](#) (self)

Test if node is a titusconfig. [More...](#)

bool [is_hpsfile](#) (self)

Test if node is a dlfile. [More...](#)

bool [is_upfile](#) (self)

Test if node is an upfile. [More...](#)

bool [is_bundle](#) (self)

Test if node is a bundle. [More...](#)

bool [is_package](#) (self)

Test if node is a package. [More...](#)

bool [is_signature](#) (self)

Test if node is a signature. [More...](#)

bool [is_control](#) (self)

Test if node is a control. [More...](#)

def [mark_modified](#) (self)

def [get_parent_archive](#) (self)

Retrieve parent archive node. [More...](#)

def [get_platform](#) (self)

Retrieve platform for this node. [More...](#)

def [get_root_archive](#) (self)

Retrieve root archive node Root archive node has no parent archive. [More...](#)

int [`get\_index`](#) (self)
 Retrieve index of this node in the list of its parent's children. [More...](#)

def [`get\_signer`](#) (self)

int [`get\_mode`](#) (self)
 Retrieve file mode of this node. [More...](#)

def [`\_\_str\_\_`](#) (self)
 ▶ Public Member Functions inherited from [NodeActionMixin](#)

def [`unlink`](#) (self)
 Remove this node from tree. [More...](#)

def [`destroy`](#) (self)
 Remove and destroy this node and all its children. [More...](#)

def [`add\_child`](#) (self, child_node, index=None)
 Add a child node. [More...](#)

def [`create\_dir`](#) (self, dir_name)
 Add a child directory If same child name exists, it will be replaced. [More...](#)

def [`create\_file`](#) (self, file_name, content=b'')
 Add a child file. [More...](#)

def [`set\_content`](#) (self, content)
 Set the content of this file node. [More...](#)

def [`set\_mode`](#) (self, mode)
 Set the mode of this file/directory. [More...](#)

def [`set\_user\_name`](#) (self, [name](#))
 Set the user name of this file/directory. [More...](#)

def [`set\_group\_name`](#) (self, [name](#))
 Set the group name of this file/directory. [More...](#)

def [`copy`](#) (self)
 Make a deep copy of this node and its content, children and attributes. [More...](#)

def [`move`](#) (self, [parent](#))
 Move this node to another parent. [More...](#)

def [`rename`](#) (self, newname)
 Rename this node and underlying tarinfo name. [More...](#)

Static Public Member Functions

def [`setup\_archive`](#) (archive, full_name)
 ▶ Static Public Member Functions inherited from [Node](#)

def [`create\_node`](#) ([name](#), entry_type)
 ▶ Static Public Member Functions inherited from [BaseNode](#)

tarfile.TarInfo [`create\_tarinfo`](#) (str tarinfo_name, entry_type)
 Tarinfo creation helper. [More...](#)

Data Fields

[platform](#)

[tar](#)

[is_gzip](#)

[pax_headers_found](#)

[signer](#)

[report](#)

► Data Fields inherited from [BaseNode](#)

[name](#)

node name (str) [More...](#)

[parent](#)

parent node ([BaseNode](#)) [More...](#)

[tarinfo](#)

children of this node in order. [More...](#)

[file_content](#)

Object representing the content of the file. [More...](#)

[signature_nodes](#)

Nodes holding signature of this node. [More...](#)

[additional_signature_nodes](#)

Nodes holding additional signature of this node. [More...](#)

► Data Fields inherited from [NodeActionMixin](#)

[parent](#)

[children](#)

[file_content](#)

[name](#)

[signature_nodes](#)

Detailed Description

Represents an archive node

Base class for Dlfile, Bundle and Package

Constructor & Destructor Documentation

[?__init__\(\)](#)

```
def __init__( self,
```

platform
)

Reimplemented in [Hpsfile](#), [Titusdl](#), [Dlfile](#), [UPfile](#), [TitusConfig](#), [BundleInfo](#), [ChangesetData](#), [DlfileMeta](#), [Bundle](#), and [Package](#).

Member Function Documentation

[?](#) **control()**

```
def control ( self )
```

[?](#) **control_node()**

```
def control_node ( self )
```

[?](#) **set_signer()**

```
bool set_signer ( self,  
                  signer_type,  
                  args = None  
                  )
```

[?](#) **setup_archive()**

```
def setup_archive ( archive,  
                   full_name static  
                   )
```

Field Documentation

[?](#) **is_gzip**

is_gzip

[?](#) **pax_headers_found**

pax_headers_found

? platform

platform

? report

report

? signer

signer

? tar

tar

The documentation for this class was generated from the following file:

- packman/packmanlib/[node.py](#)