



BundleInfo Class Reference

Inheritance diagram for BundleInfo:

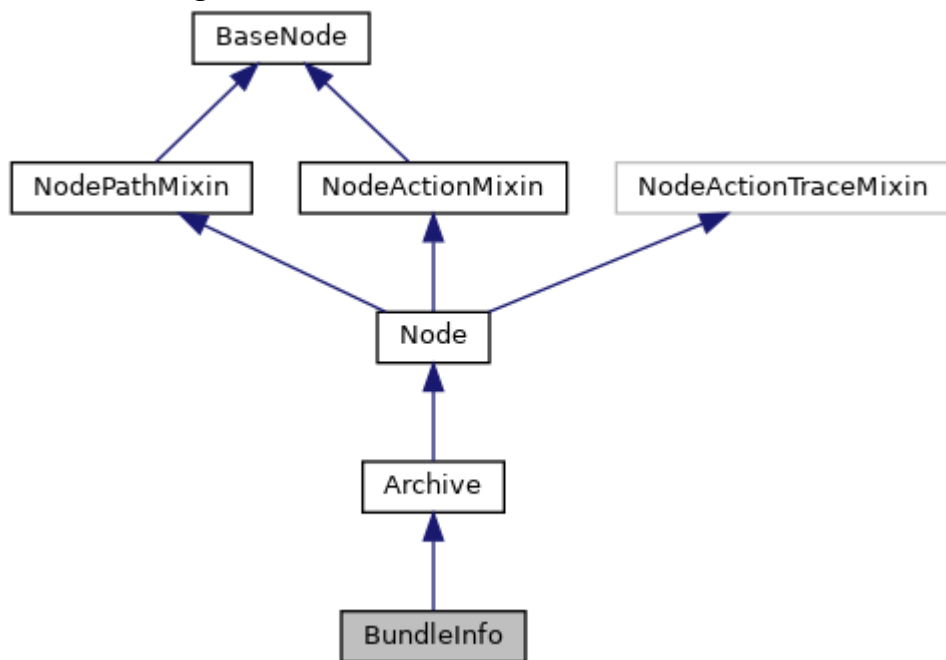

[\[legend\]](#)

Collaboration diagram for BundleInfo:

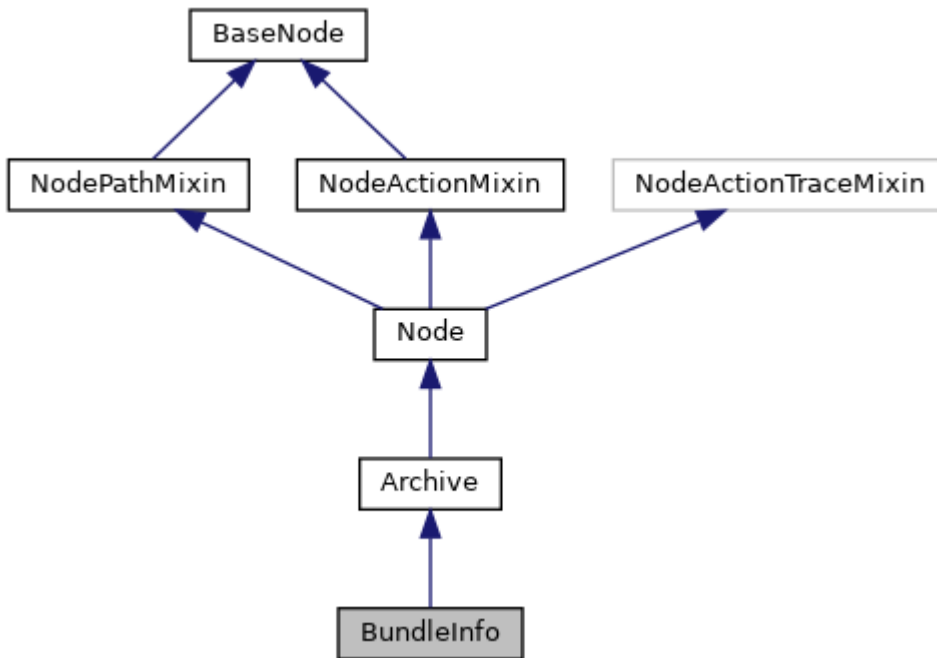

[\[legend\]](#)

Public Member Functions

def [__init__](#) (self, [platform](#))

def [changeset_node](#) (self)

def [manifest_node](#) (self)

def [get_base_name](#) (self)

def [get_csd_node](#) (self)

► Public Member Functions inherited from [Archive](#)

def [control_node](#) (self)

def [control](#) (self)

bool [set_signer](#) (self, signer_type, args=None)

► Public Member Functions inherited from [Node](#)

def [__init__](#) (self, [name](#)=None, [parent](#)=None, [tarinfo](#)=None)

► Public Member Functions inherited from [NodePathMixin](#)

def [get_path_nodes](#) (self, include_root=False, within_archive=False)

str [get_path](#) (self, include_root=False, within_archive=False)

Retrieve path of this node within the archive or withing whole tree of archives Separator '/' is used within archives and for recursion into archives. [More...](#)

int [get_depth](#) (self, within_archive=False)

Retrieve depth of node within the archive or within whole tree of archives. [More...](#)

def [find](#) (self, str node_path)

Find node according to node path provided. [More...](#)

def [find_re](#) (self, str node_path_re)

Find node according to regular expression node path provided Search will look for regex matching node name match along the path. [More...](#)

bool [has_ancestor](#) (self, ancestor)

Find if node has another node as ancestor. [More...](#)

bool [has_ancestor_name](#) (self, ancestor_name)

Find if node has an ancestor with provided name (or in list of names) [More...](#)

► Public Member Functions inherited from [BaseNode](#)

def [__init__](#) (self, str [name](#)=None, [BaseNode](#) [parent](#)=None, tarfile.TarInfo [tarinfo](#)=None)

str [get_type_str](#) (self)

Returns node type as string Supported are: "Package", "Bundle", "Dlfile", "Signature", "Control", "Manifest", "Dir", "File", "Symlink". [More...](#)

bool [is_csd](#) (self)

Test if node is a CSD. [More...](#)

bool [is_inf](#) (self)

Test if node is an INF. [More...](#)

bool [is_meta](#) (self)

Test if node is a META. [More...](#)

bool [is_manifest](#) (self)

Test if node is a manifest. [More...](#)

bool [is_titus_manifest](#) (self)

Test if node is a titus manifest. [More...](#)

bool [is_changeset](#) (self)

Test if node is a changeset. [More...](#)

bool [is_archive](#) (self)

Test if node is an archive. [More...](#)

bool [is_dlfile](#) (self)

Test if node is a dlfile. [More...](#)

bool [is_titusdl](#) (self)

Test if node is a titusdl. [More...](#)

bool [is_titusconfig](#) (self)

Test if node is a titusconfig. [More...](#)

bool [is_hpsfile](#) (self)

Test if node is a dlfile. [More...](#)

bool [is_upfile](#) (self)

Test if node is an upfile. [More...](#)

bool [is_bundle](#) (self)

Test if node is a bundle. [More...](#)

bool [is_package](#) (self)

Test if node is a package. [More...](#)

bool [is_signature](#) (self)

Test if node is a signature. [More...](#)

`bool` [`is\_control`](#) (self)
Test if node is a control. [More...](#)

`def` [`mark\_modified`](#) (self)

`def` [`get\_parent\_archive`](#) (self)
Retrieve parent archive node. [More...](#)

`def` [`get\_platform`](#) (self)
Retrieve platform for this node. [More...](#)

`def` [`get\_root\_archive`](#) (self)
Retrieve root archive node Root archive node has no parent archive. [More...](#)

`int` [`get\_index`](#) (self)
Retrieve index of this node in the list of its parent's children. [More...](#)

`def` [`get\_signer`](#) (self)

`int` [`get\_mode`](#) (self)
Retrieve file mode of this node. [More...](#)

`def` [`\_\_str\_\_`](#) (self)
► Public Member Functions inherited from [`NodeActionMixin`](#)

`def` [`unlink`](#) (self)
Remove this node from tree. [More...](#)

`def` [`destroy`](#) (self)
Remove and destroy this node and all its children. [More...](#)

`def` [`add\_child`](#) (self, child_node, index=None)
Add a child node. [More...](#)

`def` [`create\_dir`](#) (self, dir_name)
Add a child directory If same child name exists, it will be replaced. [More...](#)

`def` [`create\_file`](#) (self, file_name, content=b'')
Add a child file. [More...](#)

`def` [`set\_content`](#) (self, content)
Set the content of this file node. [More...](#)

`def` [`set\_mode`](#) (self, mode)
Set the mode of this file/directory. [More...](#)

`def` [`set\_user\_name`](#) (self, name)
Set the user name of this file/directory. [More...](#)

`def` [`set\_group\_name`](#) (self, name)
Set the group name of this file/directory. [More...](#)

`def` [`copy`](#) (self)
Make a deep copy of this node and its content, children and attributes. [More...](#)

`def` [`move`](#) (self, parent)
Move this node to another parent. [More...](#)

`def` [`rename`](#) (self, newname)
Rename this node and underlying tarinfo name. [More...](#)

Static Public Member Functions

def [create](#) ([platform](#), base_name)
▶ Static Public Member Functions inherited from [Archive](#)

def [setup_archive](#) (archive, full_name)
▶ Static Public Member Functions inherited from [Node](#)

def [create_node](#) ([name](#), entry_type)
▶ Static Public Member Functions inherited from [BaseNode](#)

tarfile.TarInfo [create_tarinfo](#) (str tarinfo_name, entry_type)
Tarinfo creation helper. [More...](#)

Additional Inherited Members

▶ Data Fields inherited from [Archive](#)

- [platform](#)
- [tar](#)
- [is_gzip](#)
- [pax_headers_found](#)
- [signer](#)
- [report](#)

▶ Data Fields inherited from [BaseNode](#)

- [name](#)
- node name (str) [More...](#)
- [parent](#)
- parent node ([BaseNode](#)) [More...](#)
- [tarinfo](#)
- children of this node in order. [More...](#)
- [file_content](#)
- Object representing the content of the file. [More...](#)
- [signature_nodes](#)
- Nodes holding signature of this node. [More...](#)
- [additional_signature_nodes](#)
- Nodes holding additional signature of this node. [More...](#)

▶ Data Fields inherited from [NodeActionMixin](#)

- [parent](#)
- [children](#)
- [file_content](#)
- [name](#)
- [signature_nodes](#)

Detailed Description

Represents a INF node (vos3)

Constructor & Destructor Documentation

?__init__()

```
def __init__( self,  
              platform  
              )
```

Reimplemented from [Archive](#).

Member Function Documentation

?changeset_node()

```
def changeset_node ( self )
```

?create()

```
def create ( platform,  
            base_name static  
            )
```

?get_base_name()

```
def get_base_name ( self )
```

?get_csd_node()

```
def get_csd_node ( self )
```

?manifest_node()

```
def manifest_node ( self )
```

The documentation for this class was generated from the following file:

- packman/packmanlib/[node.py](#)