

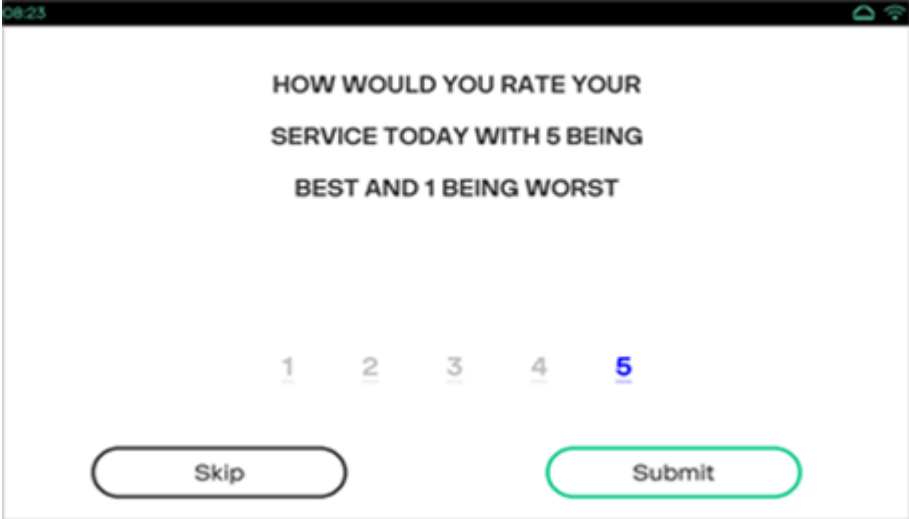
## SURVEY5

This command directs the device to display up to five (5) lines of message and prompt for 1-5 response.

### Note

The SURVEY5 command is not supported on the e235, P200, and V200 devices.

### Device UI Required

Display	User Action	Terminal Action
	Select the rating.	The device displays the Customer Survey screen with 5 rating option.

### Request Packet

Field	Rule	Type	Minimum	Maximum	Value(s)	Desc
FUNCTION_TYPE	Required	Static value	N/A	N/A	DEVICE	Type of function.
COMMAND	Required	Static value	N/A	N/A	SURVEY5	Command name

Field	Rule	Type	Minimum	Maximum	Value(s)	Description
DISPLAY_TEXT1	Optional	Character	1	50		Display text line 1. <b>Example:</b> <i>OUR SERVICE TODAY WITH</i>
DISPLAY_TEXT2	Optional	Character	1	50		Display text line 2. <b>Example:</b>
DISPLAY_TEXT3	Optional	Character	1	50		Display text line 3. <b>Example:</b>
DISPLAY_TEXT4	Optional	Character	1	50		Display text line 4. <b>Example:</b>
DISPLAY_TEXT5	Optional	Character	1	50		Display text line 5. <b>Example:</b>
RETURN_SCREEN	Optional	List	1	15	<ul style="list-style-type: none"> <li>• IDLE_SCREEN</li> <li>• LINE_ITEM</li> <li>• STAY_CURRENT</li> </ul>	This field indicates the screen request, the application will return screen is STAY_CUR
POS_RECON	Optional	Character	1	30		POS reconciliation. POS Recon back in response to POS. <b>Exa</b>
COUNTER	Required	Numeric	1	10		COUNTER is used for a given COUNTER should be higher to authenticate the POS. <b>Exa</b>
MAC	Required	Base64 Encoded Data	N/A	N/A		Message Authentication Code the POS. <b>Example:</b> BIFasiTOHbkAr/+wA81QpC
MAC_LABEL	Required	Character	1	50		Associated label that tells the use to decrypt the value of MAC authenticate the POS. <b>Example:</b>

#### Example

Following is an example of request packet

```
<TRANSACTION>
  <FUNCTION_TYPE>DEVICE</FUNCTION_TYPE>
  <COMMAND>SURVEY5</COMMAND>
  <DISPLAY_TEXT1>HOW WOULD YOU RATE OUR SERVICE TODAY WITH</
DISPLAY_TEXT1>
  <DISPLAY_TEXT2>5 BEING BEST</DISPLAY_TEXT2>
  <DISPLAY_TEXT3> AND 1 BEING</DISPLAY_TEXT3>
  <DISPLAY_TEXT4>WORST</DISPLAY_TEXT4>
  <DISPLAY_TEXT5>?</DISPLAY_TEXT5>
</TRANSACTION>
```

#### Response Packet

Field	Type	Value	Description
RESPONSE_TEXT	Character		Processor response text. <b>Example:</b> Survey Captured
RESULT	Character		This indicates the Result details. <b>Example:</b> OK

Field	Type	Value	Description
RESULT_CODE	Numeric	Expected result code, like -1	This indicates the result code. Refer to <a href="#">Result/Error Codes</a> for details.
TERMINATION_STATUS	Character	SUCCESS or FAILURE	This indicates the transaction termination status. This is the overall status of the transaction irrespective of approved or declined. Like, if the output is generated then the status is SUCCESS and if no output is generated then the status will be FAILURE.
SURVEY5_DATA	Character	1, 2, 3, 4, 5, 0(SKIP)	Returns survey data with selected options. 0 indicates the survey is skipped.
POS_RECON	Character		POS reconciliation field echoed back if sent in request. <b>Example:</b> RetailPOS1
COUNTER	Numeric		Echoes counter sent in the request. <b>Example:</b> 100

### Transaction Performance Metric

#### Note

These fields are returned, if SCAPERFMETRIC parameter ([Application Parameters](#)) is enabled.

Field	Type	Value	Description
UI_TIME	Time		This indicates the time duration, for which the device screen is displayed (like error message, prompt screen, remove card screen) till any user action is performed in the command execution flow. This field is not applicable to capture the time for the Processing, Authorizing and transaction status screen. The format of the returned value would be S.sss, where S is seconds (this can be 0 to any positive integer) and sss is milliseconds. In case of any insignificant time or 0.000 value, will not be returned in the response. <b>Example:</b> <UI_TIME>44.028</UI_TIME>
HOST_TIME	Time		This indicates the time taken for the Connection to the host, sending request and receives data from the host. This field also take the cumulative time for multiple requests which may sent to the host during the transaction including two legged transactions, timeout requests, Auto Last Tran requests, DCC, Credit app proxy. The format of the returned value would be S.sss, where S is seconds (this can be 0 to any positive integer) and sss is milliseconds. In case of any insignificant time or 0.000 value, will not be returned in the response. <b>Example:</b> <HOST_TIME>1.389</HOST_TIME>
CMD_TIME	Time		This field indicates the total amount of time for a command, which is executed by the application from request received to the response sent. The format of the returned value would be S.sss, where S is seconds (this can be 0 to any positive integer) and sss is milliseconds. In case of any insignificant time or 0.000 value, will not be returned in the response. <b>Example:</b> <CMD_TIME>70.765</CMD_TIME>

#### Example

Following is an example of response packet

```
<RESPONSE>  
  <RESPONSE_TEXT>Survey Data Captured</RESPONSE_TEXT> <RESULT>OK</RESULT>  
  <RESULT_CODE>-1</RESULT_CODE>  
  <TERMINATION_STATUS>SUCCESS</TERMINATION_STATUS>  
  <SURVEY5_DATA>1</SURVEY5_DATA>  
  <COUNTER>11</COUNTER>  
</RESPONSE>
```