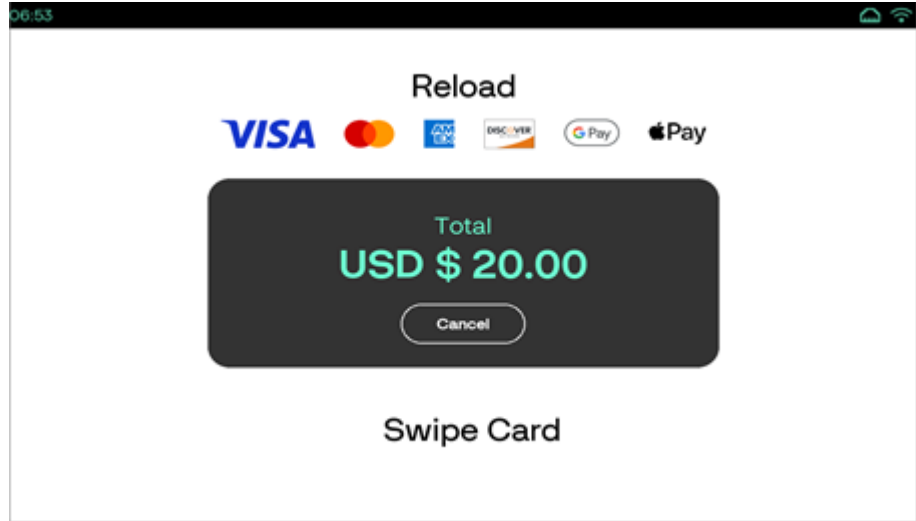
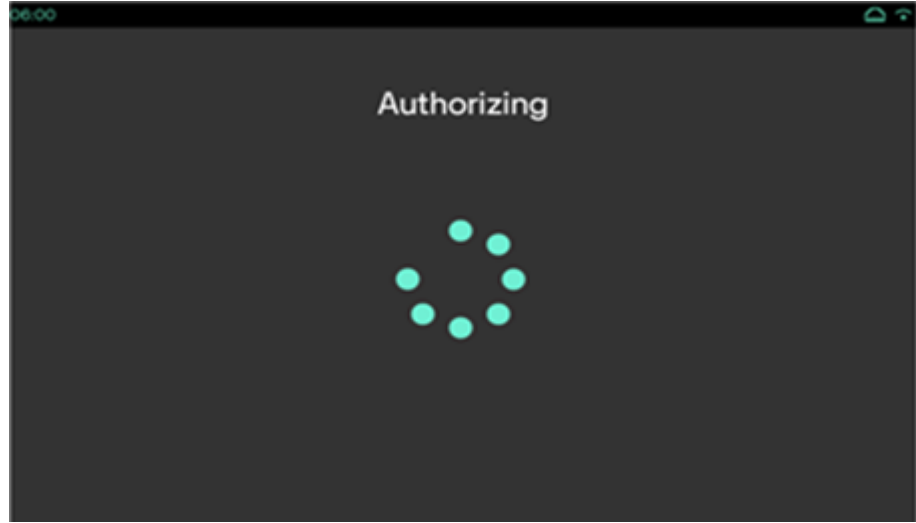


ADD_VALUE

This command is used to add the amount to the Gift card.

Device UI Required

Display	User Action	Terminal Action
<div></div>	Use the card for adding value to the gift card.	The device displays card entry screen.
<div></div>	No action	The device displays authorizing screen for reloading the value.

Request Packet

Field	Rule	Type	Minimum	Maximum	Value(s)	Description
FUNCTION_TYPE	Required	Static value	N/A	N/A	PAYMENT	Type of function
COMMAND	Required	Static value	N/A	N/A	ADD_VALUE	Command name
PAYMENT_TYPE	Required	List	N/A	N/A	GIFT MERCH_CREDIT	Payment type for Merchandise Credit. NOTE: PAYMENT_TYPE field is mandatory for token based transactions.
PAYMENT_SUBTYPE	Optional	List	N/A	N/A		Payment subtype. BLACKHAWK, CREDIT_CARD, etc.
TRANS_AMOUNT	Required	Floating point number (decimal)	1(2)	6(2)		This indicates the transaction amount. This amount can be zero amount. Example: 10.00
MANUAL_ENTRY	Optional	Boolean	N/A	N/A	TRUE FALSE	This is to instruct the system to capture account information from the keypad on the device. TRUE indicates manual entry.
MANUAL_PROMPT_OPTIONS	Optional	Character	1	50	NOEXP	This field is applicable when MANUAL_ENTRY is TRUE. The value entered here will be prompted when this field is set to TRUE. Example: NOEXP
ENCRYPT	Conditional	Boolean	N/A	N/A	TRUE FALSE	This field is required when PAN details before the processor/gateway. If encryption is required, this field must be set to TRUE as default. If not required, this field is not applicable. If the application will use device encryption, this field is not applicable.
POS_RECON	Optional	Character	1	30		POS reconciliation code. Reconciliation for RetailPOS1 back in response to RetailPOS1
CARD_TOKEN	Conditional	Character	1	40		Card token is provided for gateway-based transactions. It is a unique card. Refer to the Token section. Example: 7987654321098

Field	Rule	Type	Minimum	Maximum	Value(s)	Description
TKN_RENEW	Conditional	Character	1		Valid value: 1	Application will Gateway, require renewal. As of t applicable for U
CASHIER_ID	Optional	Character	1	10		This indicates th performing the r Example: 7987
COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10	Optional	Character	1	225		These fields rep Column 10. The for the Merchan System, which v additional data a PWC CLIENT_ When a value fo in, that same va the response. Th are not indexed, command repor sent to any paym Example: Merc
AUTH_CODE	Conditional	Character	1	16		When this field is performed off POST_AUTH. 1
BANK_USERDATA	Conditional	Character	1	50		Returned with C Whatever come BANK_USERDATA for the token sh the request. Exa
CDD_DATA	Optional	Character	1	30		Customer Defin through field an host request if th the POS request POS response. I CDD_DATA> IM CDD_DATA>
CAPTURECARD_EARLYRETURN	Optional	Binary			<ul style="list-style-type: none"> • TRUE • FALSE 	If the sending v the application r POS before proc checking in plac or masked PAN SCA will cache however, will o immediately sub request containi type – else, it w

Field	Rule	Type	Minimum	Maximum	Value(s)	Description
EMV_TAGS_REQD	Character	Binary			Valid values: Y/N	EMV tags detail is sent in request tags in the response. CAPTURECARD is sent as TRUE.
LANE	Optional	Numeric	1	8		This field is used for lane. Example: Merchant invoice 40 characters (A-Z, 0-9, hyphen, underscore, dollar sign, asterisk, and space) these are not case sensitive special characters are not allowed. INVOICE. NOT with the application maximum invoice host used in the application allows numeric values not be all zeroes.
INVOICE	Required	Character	1	40		This indicates the performing the transaction. Example: 560
SERVER_ID	Optional	Numeric	1	10		This indicates the performing the transaction. Example: 2
SHIFT_ID	Optional	Character	1	1		Store number. Example: 1
STORE_NUM	Optional	Character	1	6		Table number. Example: 10
TABLE_NUM	Optional	Numeric	1	5		This field is included in Training Mode transactions are for host simulation mocked for application DEMO parameter transactions will Training Mode pass <TRAINING_TRANSACTION_COUNTER is used label. Each COUNTER higher than the previous to authenticate transaction 100
TRAINING_MODE	Optional	List	1	3	OFF ON	
COUNTER	Required	Numeric	1	10		
MAC	Required	Base64 Encoded Data	N/A	N/A	N/A	Message Authentication Code is used to authenticate transaction

Field	Rule	Type	Minimum	Maximum	Value(s)	Description
MAC_LABEL	Required	Character	1	50		Associated label which MAC_KEY the value of MAC_KEY authenticate the REG1

Keyed Account Information

Field	Rule	Type	Minimum	Maximum	Value(s)	Description
ACCT_NUM	Optional	Numeric	1	25	PAYMENT	This field is used to enter the account number manually. For this MANUAL_ENTRY must be set to TRUE. Pre-swipe data will not be honored. Example: 67823456781313
CARD_EXP_MONTH	Required	Numeric	2	2		Card expiry month. NOTE: If the encryption is set to TRUE, then SCI will use 12 as default value if this field is not passed. Example: 12
CARD_EXP_YEAR	Required	Numeric	2	2		Card expiry year. NOTE: If encryption is set to TRUE, SCI will use 49 as default value if this field is not passed. Example: 49
BARCODE	Optional	Character	1	100		Barcode scanning option.
PIN_CODE	Required	Numeric	1	12		Gift PIN code.
CVV2	Optional	Numeric	1	10		Card Verification Value 2.

Example

Following is an example of request packet

```
<TRANSACTION>
  <FUNCTION_TYPE>PAYMENT</FUNCTION_TYPE>
  <COMMAND>ADD_VALUE</COMMAND>
  <COUNTER>1</COUNTER>
  <MAC> ... </MAC>
  <MAC_LABEL>REG2</MAC_LABEL>
  <PAYMENT_TYPE>GIFT</PAYMENT_TYPE>
  <TRANS_AMOUNT>5.00</TRANS_AMOUNT>
  <ENCRYPT>TRUE</ENCRYPT>
</TRANSACTION>
```

Following is an example of request packet - **First leg(Capture Card Early Return)**

```

<TRANSACTION>
  <FUNCTION_TYPE>PAYMENT</FUNCTION_TYPE>
  <COMMAND>ADD_VALUE</COMMAND>
  <TRANS_AMOUNT>10.00</TRANS_AMOUNT>
  <CAPTURECARD_EARLYRETURN>TRUE</CAPTURECARD_EARLYRETURN>
  <MANUAL_ENTRY>FALSE</MANUAL_ENTRY>
  <PAYMENT_TYPE>GIFT</PAYMENT_TYPE>
  <FORCE_FLAG>FALSE</FORCE_FLAG>
  <MAC_LABEL>P_EJIOKG</MAC_LABEL>
  <COUNTER>17</COUNTER>
  <MAC>/NAe/QGsQMcEIf/oOfbdjo+005ZruCRF/dcXhMJXyNI=</MAC>
</TRANSACTION>

```

Following is an example of request packet - **Second leg(Capture Card Early Return)**

```

<TRANSACTION>
  <FUNCTION_TYPE>PAYMENT</FUNCTION_TYPE>
  <COMMAND>ADD_VALUE</COMMAND>
  <TRANS_AMOUNT>10.00</TRANS_AMOUNT>
  <MANUAL_ENTRY>FALSE</MANUAL_ENTRY>
  <PAYMENT_TYPE>GIFT</PAYMENT_TYPE>
  <FORCE_FLAG>FALSE</FORCE_FLAG>
  <MAC_LABEL>P_EJIOKG</MAC_LABEL>
  <COUNTER>18</COUNTER>
  <MAC>+79s02AM69ZmGzH7I75OLz4mq57xLI5viKdz4CN53+o=</MAC>
</TRANSACTION>

```

Response Packet

Field	Type	Value	Description
RESPONSE_TEXT	Character		Processor response text. Example: CAPTURED.
RESULT	Character		This indicates the Result details. Commonly CAPTURED or DECLINED.
RESULT_CODE	Numeric	Expected result code: 4, 59040, 59074	This indicates the result code.
TERMINATION_STATUS	Character	SUCCESS and FAILURE	This indicates the transaction termination status. This is the overall status of the transaction irrespective of approved or declined. Like, if the output is generated then the status is SUCCESS and if no output is generated then the status will be FAILURE.
COUNTER	Numeric		Echoes counter sent in the request. Example: 100
COMMAND	Character		Echoes the command name, sent in the request.
BATCH_TRACE_ID	Character		Batch Trace ID, returned from PWC. This is conditional field. Example: 12cc7b17-4b45-4344-b412-5432

Field	Type	Value	Description
EMBOSSSED_ACCT_NUM	Numeric		Card number conditionally returned if present in the SSI response. Returned if payment type = GIFT and returnembossednumforgift is enabled. Example: 6499991111115789
HOST_RESPCODE	Numeric		This field will be sent if present in the host response. Example: 000
TRANS_SEQ_NUM	Numeric		Processor/Batch transaction sequence number. Example: 5 NOTE: For Private Label transaction (ADS), PT_SEQ_NUM field will be mapped to TRANS_SEQ_NUM and TROUTD fields back to SCA.
INTRN_SEQ_NUM	Numeric		PWC transaction ID. Example: 123456789
MERCHID	Numeric		Merchant ID. Example: 9000000000123
TERMID	Numeric		Merchant ID. Example: 001
TROUTD	Numeric		Transaction routing ID. Example: 123456789
CTROUTD	Numeric		CTROUTD is a sequence number for PAYMENT transactions (always enabled) that is generated per Client ID. Each Client ID has its own CTROUTD sequence counter. NOTE: For Private Label transaction (ADS), PT_CTROUTD field will be mapped to CTROUTD field back to SCA. Example: 45
LPTOKEN	Numeric		LP Token is a non-sensitive unique number assigned to each unique card number processed with the UGP gateway. This value will automatically increment by one for each unique card number. This is a conditional field. Example: 12457 NOTE: Refer to <i>Responses from Point</i> section in Message Format.
AUTH_CODE	Character		Processor authorization number. Example: 123456
PAYMENT_MEDIA	Character		Mode of payment. Example: : GIFT Card
PAYMENT_TYPE	Character		Payment type returned, like Gift. Example: GIFT
ACCT_NUM	Numeric		Returned the masked account number. NOTE: If UNMASKEDPANFORNONPCI=1 then the account number will be sent back to POS as unmasked for non PCI cards. Refer to GSC Parameters for more details on the parameter. Example: 600649*****9147

Field	Type	Value	Description
CARDHOLDER	Character		Returned for swiped transactions. Example: TEST PROCESSOR
CARD_EXP_MONTH	Numeric		Card expiry month. Example: 12
CARD_EXP_YEAR	Numeric		Card expiry year. Example: 20
CARD_ENTRY_MODE	Character		Returns card entry mode values. NOTE: Refer to Card Entry Mode for details on possible values. Example: 123123
EMV_TAGS	Character		This is returned for Early Card Capture payment flows for Non PCI BIN ranges, only when EMV_TAGS_REQD is sent as Y.
PIN_CODE	Numeric		Gift PIN code. This is a conditional field. This field will return in POS response if GIFTPINTOPOS parameter is enabled. Refer to Application Parameters for more details on this parameter.
CARD_CLASS	Numeric		This field is returned to identify the card type of the gift transaction. Example: 0
INVOICE	Numeric		Invoice number returned. Example: 123456
RESPONSE_CODE	Character A and E		Response code data will be returned to POS, same as received from the Host if this is present in Host response. Example: <RESPONSE_CODE>E</RESPONSE_CODE>
POS_RECON	Character		POS reconciliation field echoed back if sent in request. Example: RetailPOS1
APPROVED_AMOUNT	Floating point number		The amount which got approved. Example: 10.00.
AVAILABLE_BALANCE	Floating point number		Available balance on the card used for transaction. This field will be returned to POS, when the Host returns the Available Balance data. SCA application sends <BALANCE_ENQ> as Host request field and based on the processor, it returns the Available Balance, and SCA will send it back to POS. Example: 60.00
PREVIOUS_BALANCE	Floating point number		Previous balance on card. Example: 200.00.
AUTH_RESP_CODE	Character		Returns by some processors when the transaction is declined. Maximum 19 bytes. Example: 0131
RECEIPT_DATA	Character		Receipt Data.
TRANS_DATE	Character		Transaction date returned. Example: 2016.09.20
TRANS_TIME	Character		Transaction time returned. Example: 09:16:25

Field	Type	Value	Description
TRAN_LANG_CODE	Character	en – English fr – French es – Spanish	This field contains the language code for the current transaction which is finalized based on the configured language on terminal and language preference from the card. This field will be returned only whenever the Card data is captured from cardholder during transaction flow. If Language code is not available from card, then terminal language will be returned. This field needs to be added for the below transaction flows.
TRANS_CURRENCY_CODE	Numeric		<ul style="list-style-type: none"> This is the currency code of the transaction. This field is sent from POS to identify if it is US or Canada transaction. Example: <ul style="list-style-type: none"> For USA, POS response is: < TRANS_CURRENCY_CODE> 0840</ TRANS_CURRENCY_CODE> For Canada, POS response: < TRANS_CURRENCY_CODE> 0124</ TRANS_CURRENCY_CODE>
AUTH_REF_NUMBER	Character	Example: 123456789012345 Or It can be empty	This tag returns in the host response with the value for the particular transaction. This is used by some merchants to refer to the transaction at the host side. Currently this is applicable only for Worldpay processor.
COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10	Character		Column 3 to Column 10 fields value will be echoed in POS response. These fields are not sent to any payment processor.

Processor-Based Token (Conditional)

Note

For use with host based processors supporting card based token implementations.

Field	Type	Value	Description
CARD_TOKEN	Character		Card Token field is returned in most of the GIFT administrative transactions. Example: 7987654321098765 NOTE: Refer to <i>Card Tokens</i> section in <i>Point Integration Best Practices</i> .
TOKEN_SOURCE	Character		Source of the token. Example: PWC

Transaction Performance Metric

Note

These fields are returned, if SCAPERFMETRIC parameter ([Application Parameters](#)) is enabled.

Field	Type	Value	Description
UI_TIME	Time		This indicates the time duration, for which the device screen is displayed (like error message, prompt screen, remove card screen) till any user action is performed in the command execution flow. This field is not applicable to capture the time for the Processing, Authorizing and transaction status screen. The format of the returned value would be S.sss, where S is seconds (this can be 0 to any positive integer) and sss is milliseconds. In case of any insignificant time or 0.000 value, will not be returned in the response. Example: <UI_TIME>44.028</UI_TIME>
HOST_TIME	Time		This indicates the time taken for the Connection to the host, sending request and receives data from the host. This field also take the cumulative time for multiple requests which may sent to the host during the transaction including two legged transactions, timeout requests, Auto Last Tran requests, DCC, Credit app proxy. The format of the returned value would be S.sss, where S is seconds (this can be 0 to any positive integer) and sss is milliseconds. In case of any insignificant time or 0.000 value, will not be returned in the response. Example: <HOST_TIME>1.389</HOST_TIME>
CMD_TIME	Time		This field indicates the total amount of time for a command, which is executed by the application from request received to the response sent. The format of the returned value would be S.sss, where S is seconds (this can be 0 to any positive integer) and sss is milliseconds. In case of any insignificant time or 0.000 value, will not be returned in the response. Example: <CMD_TIME>70.765</CMD_TIME>

Example

Following is an example of response packet

```
<RESPONSE>
  <APPROVD_AMOUNT>5.00</APPROVED_AMOUNT>
  <AUTH_CODE>123654</AUTH_CODE>
  <AVAILABLE_BALANCE>10.00</AVAILABLE_BALANCE>
  <ACCT_NUM>600649*****9147</ACCT_NUM>
  <CARDHOLDER>PROCESSOR GIFT</CARDHOLDER>
  <CTROUTD>141</CTROUTD>
  <INTRN_SEQ_NUM>569230</INTRN_SEQ_NUM>
  <PAYMENT_MEDIA>GIFT</PAYMENT_MEDIA>
  <PAYMENT_TYPE>GIFT</PAYMENT_TYPE>
  <RESPONSE_TEXT>TRANSACTION APPROVED</RESPONSE_TEXT>
  <RESULT>APPROVED</RESULT>
  <RESULT_CODE>5</RESULT_CODE>
  <TERMINATION_STATUS>SUCCESS</TERMINATION_STATUS>
```

```
<TRANS_SEQ_NUM>19</TRANS_SEQ_NUM>
<TROUTD>569230</TROUTD>
<TRAN_LANG_CODE>en</TRAN_LANG_CODE>
</RESPONSE>
```

Following is an example of response packet - **First leg(Capture Card Early Return)**

```
<RESPONSE>
  <RESPONSE_TEXT>CAPTURE EARLY CARD NOTIFICATION</RESPONSE_TEXT>
  <RESULT>OK</RESULT>
  <RESULT_CODE>-1</RESULT_CODE>
  <TERMINATION_STATUS>SUCCESS</TERMINATION_STATUS>
  <COUNTER>17</COUNTER>
  <CARD_TRACK1>
B60105*****
</CARD_TRACK1>
  <CARD_TRACK2>601056*****4680</CARD_TRACK2>
  <ACCT_NUM>601056*****6057</ACCT_NUM>
  <TRANS_AMOUNT>10.00</TRANS_AMOUNT>
  <CARD_EXP_MONTH>**</CARD_EXP_MONTH>
  <CARD_EXP_YEAR>**</CARD_EXP_YEAR>
  <CARDHOLDER>RAPI*****</CARDHOLDER>
  <PAYMENT_TYPE>GIFT</PAYMENT_TYPE>
  <PAYMENT_MEDIA>GIFT</PAYMENT_MEDIA>
  <CARD_ENTRY_MODE>Swiped</CARD_ENTRY_MODE>
  <INVOICE>123456</INVOICE>
</RESPONSE>
```

Following is an example of response packet - **Second leg(Capture Card Early Return)**

```
<RESPONSE>
  <ACCT_NUM>601056*****6057</ACCT_NUM>
  <COMMAND>ADD_VALUE</COMMAND>
  <BANK_USERDATA>GIFT</BANK_USERDATA>
  <BATCH_TRACE_ID>84cea432-6cdd-42a2-91b1-7153864f8529</BATCH_TRACE_ID>
  <CARD_ABBRV>GF</CARD_ABBRV>
  <CARD_ENTRY_MODE>Swiped</CARD_ENTRY_MODE>
  <CARD_EXP_MONTH>**</CARD_EXP_MONTH>
  <CARD_EXP_YEAR>**</CARD_EXP_YEAR>
  <CARDHOLDER>RAPI*****</CARDHOLDER>
  <CTROUTD>75066</CTROUTD>
  <INVOICE>123456</INVOICE>
  <EMBOSSSED_ACCT_NUM>286831*****4680</EMBOSSSED_ACCT_NUM>
  <INTRN_SEQ_NUM>4016100329</INTRN_SEQ_NUM>
  <PAYMENT_MEDIA>GIFT</PAYMENT_MEDIA>
  <PAYMENT_TYPE>GIFT</PAYMENT_TYPE>
  <RESPONSE_TEXT>04: Inactive account.</RESPONSE_TEXT>
  <RESULT>DECLINED</RESULT>
  <RESULT_CODE>6</RESULT_CODE>
  <TERMINATION_STATUS>SUCCESS</TERMINATION_STATUS>
  <TRANS_AMOUNT>10.00</TRANS_AMOUNT>
  <TRANS_DATE>2022.07.12</TRANS_DATE>
  <TRAN_LANG_CODE>en</TRAN_LANG_CODE>
```

<TRANS_SEQ_NUM>20928</TRANS_SEQ_NUM>
<TRANS_TIME>02:41:05</TRANS_TIME>
<TROUTD>4016100329</TROUTD>
<COUNTER>18</COUNTER>
</RESPONSE>