



https://verifone.cloud/docs/sca-functional-specification/payment_func/gift_card/gift_transaction/add_value

Updated: 19-Jan-2026

Add Value

This command is used to add the amount to the Gift card.

Rules

The session should be active.

Configuration Parameter

Following are the configuration parameters which affect the operation. Refer to [Application Parameters](#) table for more details on the below parameters.

- GIFTPIINTOPOS
- returnembossednumforgift

ADD_VALUE (Message Interface)


The following tables provide corresponding device UI interactions, detailed protocol information, including field descriptions and examples.

Device UI Required


Note

Neo device (M450) is being used to capture screenshots for the Device UI Requirements section.

Display	User Action	Terminal Action
---------	-------------	-----------------

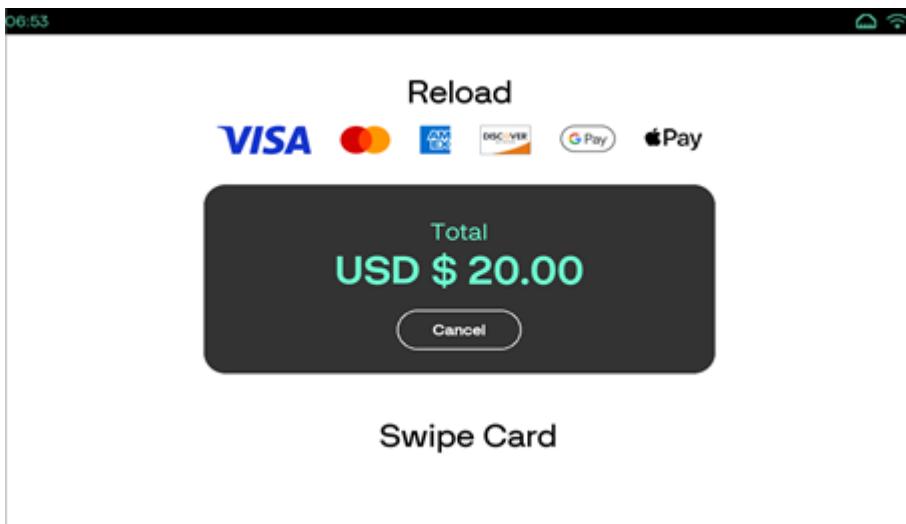

Use the card for adding value to the gift card. The device displays card entry screen.

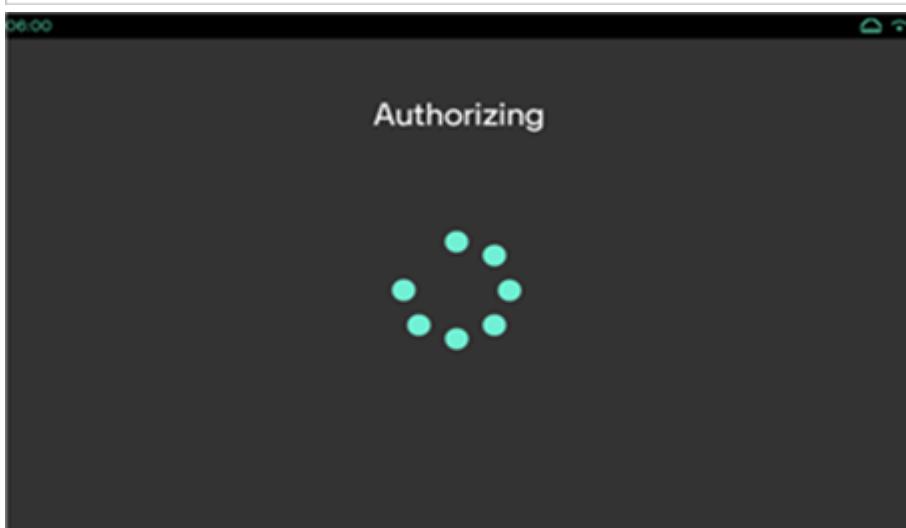

No action The device displays authorizing screen for reloading the value.

Request Packet

Field	Rule	Type	Minimum	Maximum	Value(s)	
FUNCTION_TYPE	Required	Static value	N/A	N/A	PAYMENT	Type of fu
COMMAND	Required	Static value	N/A	N/A	ADD_VALUE	Command
PAYMENT_TYPE	Required	List	N/A	N/A	GIFT MERCH_CREDIT	Payment type Merchandise NOT field toke
PAYMENT_SUBTYPE	Optional	List	N/A	N/A		Payment sub BLACKH

Field	Rule	Type	Minimum	Maximum	Value(s)	
TRANS_AMOUNT	Required	Floating point number (decimal)	1(2)	6(2)		This indicates the transaction amount. This field must be present and cannot be zero amount.
MANUAL_ENTRY	Optional	Boolean	N/A	N/A	TRUE FALSE	This is to indicate if the transaction is entered manually. This field is used in conjunction with the MANUAL_ENTRY field. This field is used to indicate if the transaction is entered manually. This field is used in conjunction with the MANUAL_ENTRY field.
MANUAL_PROMPT_OPTIONS	Optional	Character	1	50	NOEXP	TRUE. This field is used to indicate if the transaction is entered manually. This field is used in conjunction with the MANUAL_ENTRY field. This field is used to indicate if the transaction is entered manually. This field is used in conjunction with the MANUAL_ENTRY field.
ENCRYPT	Conditional	Boolean	N/A	N/A	TRUE FALSE	TRUE as this field is used to indicate if the transaction is encrypted. This field is used in conjunction with the ENCRYPT field. This field is used to indicate if the transaction is encrypted. This field is used in conjunction with the ENCRYPT field.
POS_RECON	Optional	Character	1	30		POS reconstruction. This field is used to indicate if the transaction is reconstructed. This field is used in conjunction with the POS_RECON field. This field is used to indicate if the transaction is reconstructed. This field is used in conjunction with the POS_RECON field.
CARD_TOKEN	Conditional	Character	1	40		Card tokenization. This field is used to indicate if the transaction is tokenized. This field is used in conjunction with the CARD_TOKEN field. This field is used to indicate if the transaction is tokenized. This field is used in conjunction with the CARD_TOKEN field.
TKN_RENEW	Conditional	Character	1		Valid value: 1	Application Gateway, renewal. This field is used to indicate if the transaction is a renewal. This field is used in conjunction with the TKN_RENEW field. This field is used to indicate if the transaction is a renewal. This field is used in conjunction with the TKN_RENEW field.
CASHIER_ID	Optional	Character	1	10		This indicates the cashier ID performing the transaction. This field is used in conjunction with the CASHIER_ID field. This field is used to indicate the cashier ID performing the transaction. This field is used in conjunction with the CASHIER_ID field.

Field	Rule	Type	Minimum	Maximum	Value(s)
COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10	Optional	Character 1		225	These fields are part of the message structure. Column 10 is reserved for the Message ID. The remaining fields are for the Message System, with additional fields for the PWC Client. When a value is present in, that same value is returned in the response. These fields are not indexed by the command and are not sent to any other command.
AUTH_CODE		Conditional Character 1		16	Example: When this field is present, it indicates that a POST_AUTH command was performed. The value is returned with the response.
BANK_USERDATA		Conditional Character 1		50	Returned with the response. Whatever value is present in the BANK_USERDATA field for the token is returned in the response.
CDD_DATA	Optional	Character 1		30	Customer data through file transfer or host requests. The POS returns the POS response with the CDD_DATA field.
CAPTURECARD_EARLYRETURN	Optional	Binary			<ul style="list-style-type: none"> • TRUE • FALSE <p>If the sending application sends this field with a value of TRUE or masked, the SCA will return the response immediately. However, when FALSE is sent, the request continues as if it were a type - else request. The EMV tags are sent in response to the tags in the CAPTURECARD command. This field is sent as TRUE.</p>
EMV_TAGS_REQD		Character	Binary		Valid values: Y/N
LANE	Optional	Numeric	1	8	This field is used to identify the lane. Example: This field is used to identify the lane.

Field	Rule	Type	Minimum	Maximum	Value(s)
INVOICE	Required	Character 1	40		Merchant ID 40 characters these are not special characters INVOICE with the maximum host used allows numbers not be all zeros This indicates performing a Example:
SERVER_ID	Optional	Numeric 1	10		This indicates Example:
SHIFT_ID	Optional	Character 1	1		Store number Example:
STORE_NUM	Optional	Character 1	6		Table number Example:
TABLE_NUM	Optional	Numeric 1	5		
SCREEN_UPDATES_ENABLED	Optional	Binary			<p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Does not display Authorizing and Status Screens • 1 - Displays Authorizing and Status Screens (Default) <p>Determine and Transaction required to transaction</p>
TRAINING_MODE	Optional	List	1	3	OFF ON
COUNTER	Required	Numeric 1	10		<p>This field is for host simulation mode. It is mocked for DEMO parameter transaction. Training Mode pass <TRAINING_MODE> label. Each value is higher than 100 to authenticate.</p>

Field	Rule	Type	Minimum	Maximum	Value(s)
MAC	Required	Base64 Encoded Data	N/A	N/A	N/A
MAC_LABEL	Required	Character	1	50	REG1

Keyed Account Information

Field	Rule	Type	Minimum	Maximum	Value(s)	Description
ACCT_NUM	Optional	Numeric	1	25	PAYMENT	This field is used to enter the account number manually. For this MANUAL_ENTRY must be set to TRUE. Pre-swipe data will not be honored. Example: 67823456781313
CARD_EXP_MONTH	Required	Numeric	2			Card expiry month. NOTE: If the encryption is set to TRUE, then SCI will use 12 as default value if this field is not passed. Example: 12
CARD_EXP_YEAR	Required	Numeric	2			Card expiry year. NOTE: If encryption is set to TRUE, SCI will use 49 as default value if this field is not passed. Example: 49
BARCODE	Optional	Character	1	100		Barcode scanning option.
PIN_CODE	Required	Numeric	1	12		Gift PIN code.
CVV2	Optional	Numeric	1	10		Card Verification Value 2.

Multi Merchant Transaction

Refer to [Multi Merchant Support](#) for more details on this feature.

Note

For Multi Merchant transactions, either of the field is mandatory to send in POS request.

Field	Rule	Type	Minimum	Maximum	Value(s)	Description
-------	------	------	---------	---------	----------	-------------

MMACCOUNT	Conditional Character 1	20	This field contains the Multi Merchant Account number or account name, which is used by the application to identify the correct Client ID and Device Key to be used for performing Host operations like Transactions and Reports. This field is mandatory if the device has a Multi Merchant setup on-boarding and if DEFAULTMERCHANTACCOUNT parameter is not set. Example: 123456789/ 121212/ zxcvbnmQWERTY1
MMPIN	Conditional Character 6	6	This field contains PIN value which will be used for MMACCOUNT authentication. MMPIN update and setup is handled on PWC portal. The default value is usually the same as MMACCOUNT. Example: 001212/ 123456

Example

Following is an example of request packet

```
<TRANSACTION>
  <FUNCTION_TYPE>PAYMENT</FUNCTION_TYPE>
  <COMMAND>ADD_VALUE</COMMAND>
  <COUNTER>1</COUNTER>
  <MAC> ... </MAC>
  <MAC_LABEL>REG2</MAC_LABEL>
  <PAYMENT_TYPE>GIFT</PAYMENT_TYPE>
  <TRANS_AMOUNT>5.00</TRANS_AMOUNT>
  <ENCRYPT>TRUE</ENCRYPT>
</TRANSACTION>
```

Following is an example of request packet - **First leg(Capture Card Early Return)**

```
<TRANSACTION>
  <FUNCTION_TYPE>PAYMENT</FUNCTION_TYPE>
  <COMMAND>ADD_VALUE</COMMAND>
  <TRANS_AMOUNT>10.00</TRANS_AMOUNT>
  <CAPTURECARD_EARLYRETURN>TRUE</CAPTURECARD_EARLYRETURN>
  <MANUAL_ENTRY>FALSE</MANUAL_ENTRY>
  <PAYMENT_TYPE>GIFT</PAYMENT_TYPE>
  <FORCE_FLAG>FALSE</FORCE_FLAG>
  <MAC_LABEL>P_EJIOKG</MAC_LABEL>
  <COUNTER>17</COUNTER>
```

```

<MAC>/NAe/QGsqMCeIf/oOFbdjo+005ZruCRF/dcXhMJXyNI=</MAC>
</TRANSACTION>

```

Following is an example of request packet - **Second leg(Capture Card Early Return)**

```

<TRANSACTION>
  <FUNCTION_TYPE>PAYMENT</FUNCTION_TYPE>
  <COMMAND>ADD_VALUE</COMMAND>
  <TRANS_AMOUNT>10.00</TRANS_AMOUNT>
  <MANUAL_ENTRY>FALSE</MANUAL_ENTRY>
  <PAYMENT_TYPE>GIFT</PAYMENT_TYPE>
  <FORCE_FLAG>FALSE</FORCE_FLAG>
  <MAC_LABEL>P_EJIOKG</MAC_LABEL>
  <COUNTER>18</COUNTER>
  <MAC>+79s02AM69ZmGzH7I750Lz4mq57xLI5viKdz4CN53+o=</MAC>
</TRANSACTION>

```

Response Packet

Field	Type	Value	Description
RESPONSE_TEXT	Character		Processor response text. Example: CAPTURED.
RESULT	Character		This indicates the Result details. Commonly CAPTURED or DECLINED.
RESULT_CODE	Numeric	Expected result code: 4, 59040, 59074	This indicates the result code.
TERMINATION_STATUS	Character	SUCCESS and FAILURE	This indicates the transaction termination status. This is the overall status of the transaction irrespective of approved or declined. Like, if the output is generated then the status is SUCCESS and if no output is generated then the status will be FAILURE.
COUNTER	Numeric		Echoes counter sent in the request. Example: 100
COMMAND	Character		Echoes the command name, sent in the request.
BATCH_TRACE_ID	Character		Batch Trace ID, returned from PWC. This is conditional field. Example: 12cc7b17-4b45-4344-b412-5432
EMBOSSED_ACCT_NUM	Numeric		Card number conditionally returned if present in the SSI response. Returned if payment type = GIFT and returnembossednumforgift is enabled. Example: 649999111115789
HOST_RESPCODE	Numeric		This field will be sent if present in the host response. Example: 000

Field	Type	Value	Description
TRANS_SEQ_NUM	Numeric		<p>Processor/Batch transaction sequence number.</p> <p>Example: 5</p> <p>NOTE: For Private Label transaction (ADS), PT_SEQ_NUM field will be mapped to TRANS_SEQ_NUM and TROUTD fields back to SCA.</p>
INTRN_SEQ_NUM	Numeric		PWC transaction ID. Example: 123456789
MERCHID	Numeric		Merchant ID. Example: 900000000123
TERMINAL_ID	Numeric		Merchant ID. Example: 001
TROUTD	Numeric		Transaction routing ID. Example: 123456789
CTROUTD	Numeric		CTROUTD is a sequence number for PAYMENT transactions (always enabled) that is generated per Client ID. Each Client ID has its own CTROUTD sequence counter. NOTE: For Private Label transaction (ADS), PT_CTRROUTD field will be mapped to CTROUTD field back to SCA. Example: 45
LPTOKEN	Numeric		<p>LP Token is a non-sensitive unique number assigned to each unique card number processed with the UGP gateway. This value will automatically increment by one for each unique card number. This is a conditional field.</p> <p>Example: 12457</p> <p>NOTE: Refer to <i>Responses from Point</i> section in Message Format.</p>
AUTH_CODE	Character		Processor authorization number. Example: 123456
PAYMENT_MEDIA	Character		Mode of payment. Example: : GIFT Card
PAYMENT_TYPE	Character		Payment type returned, like Gift. Example: GIFT
ACCT_NUM	Numeric		Returned the masked account number. NOTE: If UNMASKEDPANFORNONPCI=1 then the account number will be sent back to POS as unmasked for non PCI cards. Refer to GSC Parameters for more details on the parameter. Example: 600649*****9147
CARDHOLDER	Character		Returned for swiped transactions. Example: TEST PROCESSOR
CARD_EXP_MONTH	Numeric		Card expiry month. Example: 12
CARD_EXP_YEAR	Numeric		Card expiry year. Example: 20

Field	Type	Value	Description
CARD_ENTRY_MODE	Character		Returns card entry mode values. NOTE: Refer to Card Entry Mode for details on possible values. Example: 123123
EMV_TAGS	Character		This is returned for Early Card Capture payment flows for Non PCI BIN ranges, only when EMV_TAGS_REQD is sent as Y.
PIN_CODE	Numeric		Gift PIN code. This is a conditional field. This field will return in POS response if GIFTPINTOPOS parameter is enabled. Refer to Application Parameters for more details on this parameter.
CARD_CLASS	Numeric		This field is returned to identify the card type of the gift transaction. Example: 0
INVOICE	Numeric		Invoice number returned. Example: 123456
RESPONSE_CODE	Character A and E		Response code data will be returned to POS, same as received from the Host if this is present in Host response. Example: <RESPONSE_CODE>E</RESPONSE_CODE>
POS_RECON	Character		POS reconciliation field echoed back if sent in request. Example: RetailPOS1
APPROVED_AMOUNT	Floating point number		The amount which got approved. Example: 10.00.
AVAILABLE_BALANCE	Floating point number		Available balance on the card used for transaction. This field will be returned to POS, when the Host returns the Available Balance data. SCA application sends <BALANCE_ENQ> as Host request field and based on the processor, it returns the Available Balance, and SCA will send it back to POS. Example: 60.00
PREVIOUS_BALANCE	Floating point number		Previous balance on card. Example: 200.00.
AUTH_RESP_CODE	Character		Returns by some processors when the transaction is declined. Maximum 19 bytes. Example: 0131
RECEIPT_DATA	Character		Receipt Data.
TRANS_DATE	Character		Transaction date returned. Example: 2016.09.20
TRANS_TIME	Character		Transaction time returned. Example: 09:16:25

Field	Type	Value	Description
TRAN_LANG_CODE	Character	en – English fr – French es – Spanish	This field contains the language code for the current transaction which is finalized based on the configured language on terminal and language preference from the card. This field will be returned only whenever the Card data is captured from cardholder during transaction flow. If Language code is not available from card, then terminal language will be returned. This field needs to be added for the below transaction flows.
TRANS_CURRENCY_CODE	Numeric		<ul style="list-style-type: none"> • This is the currency code of the transaction. This field is sent from POS to identify if it is US or Canada transaction. Example: <ul style="list-style-type: none"> ◦ For USA, POS response is: <TRANS_CURRENCY_CODE> 0840</TRANS_CURRENCY_CODE> ◦ For Canada, POS response: <TRANS_CURRENCY_CODE> 0124</TRANS_CURRENCY_CODE>
AUTH_REF_NUMBER	Character	Example: 123456789012345	This tag returns in the host response with the value for the particular transaction. This is used by some merchants to refer to the transaction at the host side. Currently this is applicable only for Worldpay processor.
COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10	Character		Column 3 to Column 10 fields value will be echoed in POS response. These fields are not sent to any payment processor.

Processor-Based Token (Conditional)

Note

For use with host based processors supporting card based token implementations.

Field	Type	Value	Description
CARD_TOKEN	Character		<p>Card Token field is returned in most of the GIFT administrative transactions. Example: 7987654321098765</p> <p>NOTE: Refer to <i>Card Tokens</i> section in <i>Point Integration Best Practices</i>.</p>
TOKEN_SOURCE	Character		Source of the token. Example: PWC

Transaction Performance Metric

Note

These fields are returned, if SCAPERFMETRIC parameter ([Application Parameters](#)) is enabled.

Field	Type	Value	Description
UI_TIME	Time		This indicates the time duration, for which the device screen is displayed (like error message, prompt screen, remove card screen) till any user action is performed in the command execution flow. This field is not applicable to capture the time for the Processing, Authorizing and transaction status screen. The format of the returned value would be S.sss, where S is seconds (this can be 0 to any positive integer) and sss is milliseconds. In case of any insignificant time or 0.000 value, will not be returned in the response. Example: <UI_TIME>44.028</UI_TIME>
HOST_TIME	Time		This indicates the time taken for the Connection to the host, sending request and receives data from the host. This field also take the cumulative time for multiple requests which may sent to the host during the transaction including two legged transactions, timeout requests, Auto Last Tran requests, DCC, Credit app proxy. The format of the returned value would be S.sss, where S is seconds (this can be 0 to any positive integer) and sss is milliseconds. In case of any insignificant time or 0.000 value, will not be returned in the response. Example: <HOST_TIME>1.389</HOST_TIME>
CMD_TIME	Time		This field indicates the total amount of time for a command, which is executed by the application from request received to the response sent. The format of the returned value would be S.sss, where S is seconds (this can be 0 to any positive integer) and sss is milliseconds. In case of any insignificant time or 0.000 value, will not be returned in the response. Example: <CMD_TIME>70.765</CMD_TIME>

Example

Following is an example of response packet

```
<RESPONSE>
  <APPROVED_AMOUNT>5.00</APPROVED_AMOUNT>
  <AUTH_CODE>123654</AUTH_CODE>
  <AVAILABLE_BALANCE>10.00</AVAILABLE_BALANCE>
  <ACCT_NUM>600649*****9147</ACCT_NUM>
  <CARDHOLDER>PROCESSOR GIFT</CARDHOLDER>
  <CTROUTD>141</CTROUTD>
  <INTRN_SEQ_NUM>569230</INTRN_SEQ_NUM>
  <PAYMENT_MEDIA>GIFT</PAYMENT_MEDIA>
  <PAYMENT_TYPE>GIFT</PAYMENT_TYPE>
  <RESPONSE_TEXT>TRANSACTION APPROVED</RESPONSE_TEXT>
  <RESULT>APPROVED</RESULT>
  <RESULT_CODE>5</RESULT_CODE>
  <TERMINATION_STATUS>SUCCESS</TERMINATION_STATUS>
```

```

<TRANS_SEQ_NUM>19</TRANS_SEQ_NUM>
<TROUTD>569230</TROUTD>
<TRAN_LANG_CODE>en</TRAN_LANG_CODE>
</RESPONSE>

```

Following is an example of response packet - **First leg(Capture Card Early Return)**

```

<RESPONSE>
  <RESPONSE_TEXT>CAPTURE EARLY CARD NOTIFICATION</RESPONSE_TEXT>
  <RESULT>OK</RESULT>
  <RESULT_CODE>-1</RESULT_CODE>
  <TERMINATION_STATUS>SUCCESS</TERMINATION_STATUS>
  <COUNTER>17</COUNTER>
  <CARD_TRACK1>
B60105*****4680 . .
</CARD_TRACK1>
  <CARD_TRACK2>601056*****4680</CARD_TRACK2>
  <ACCT_NUM>601056*****6057</ACCT_NUM>
  <TRANS_AMOUNT>10.00</TRANS_AMOUNT>
  <CARD_EXP_MONTH>**</CARD_EXP_MONTH>
  <CARD_EXP_YEAR>**</CARD_EXP_YEAR>
  <CARDHOLDER>RAPI*****</CARDHOLDER>
  <PAYMENT_TYPE>GIFT</PAYMENT_TYPE>
  <PAYMENT_MEDIA>GIFT</PAYMENT_MEDIA>
  <CARD_ENTRY_MODE>Swiped</CARD_ENTRY_MODE>
  <INVOICE>123456</INVOICE>
</RESPONSE>

```

Following is an example of response packet - **Second leg(Capture Card Early Return)**

```

<RESPONSE>
  <ACCT_NUM>601056*****6057</ACCT_NUM>
  <COMMAND>ADD_VALUE</COMMAND>
  <BANK_USERDATA>GIFT</BANK_USERDATA>
  <BATCH_TRACE_ID>84cea432-6cdd-42a2-91b1-7153864f8529</
BATCH_TRACE_ID>
  <CARD_ABBRV>GF</CARD_ABBRV>
  <CARD_ENTRY_MODE>Swiped</CARD_ENTRY_MODE>
  <CARD_EXP_MONTH>**</CARD_EXP_MONTH>
  <CARD_EXP_YEAR>**</CARD_EXP_YEAR>
  <CARDHOLDER>RAPI*****</CARDHOLDER>
  <CTROUTD>75066</CTROUTD>
  <INVOICE>123456</INVOICE>
  <EMBOSSED_ACCT_NUM>286831*****4680</EMBOSSED_ACCT_NUM>
  <INTRN_SEQ_NUM>4016100329</INTRN_SEQ_NUM>
  <PAYMENT_MEDIA>GIFT</PAYMENT_MEDIA>
  <PAYMENT_TYPE>GIFT</PAYMENT_TYPE>
  <RESPONSE_TEXT>04: Inactive account.</RESPONSE_TEXT>
  <RESULT>DECLINED</RESULT>
  <RESULT_CODE>6</RESULT_CODE>
  <TERMINATION_STATUS>SUCCESS</TERMINATION_STATUS>
  <TRANS_AMOUNT>10.00</TRANS_AMOUNT>
  <TRANS_DATE>2022.07.12</TRANS_DATE>

```

```
<TRAN_LANG_CODE>en</TRAN_LANG_CODE>
<TRANS_SEQ_NUM>20928</TRANS_SEQ_NUM>
<TRANS_TIME>02:41:05</TRANS_TIME>
<TROUTD>4016100329</TROUTD>
<COUNTER>18</COUNTER>
</RESPONSE>
```