

 $\underline{\underline{https://verifone.cloud/docs/sca-functional-specification/device\_transaction/signature\_capture\_expanded}$ 

Updated: 23-Sep-2025

# **Signature Capture Expanded**

This command directs the device to capture signature from a customer while showing more disclaimer text on the screen.

Note

This command is supported by touch capable Engage devices only. Engage devices have limited text space available on screen. Not supported by TSYS Direct Engage as of this publication.

Note

**Signature Files** for Android devices are larger in size compared to Engage and Mx devices, as Android devices have higher resolution screen. The Engage and Mx signature files are monochrome (1 bit per pixel) files whereas M440 is RGB with non-white background. This is the reason for higher data size and it always use 24 bit RGB. TIFF file format is not supported on Android based devices. This is also applicable for Signature Capture in AUTHORIZE (Message Interface) and Capture commands.

### **Rules**

- 1. The SIGNATURE\_EX command is intended for non-payment purposes and is to be used outside of a payment transaction.
- 2. SIGNATURECAPTURE parameter should be enabled.

# **Configuration Parameters**

Following are the configuration parameters which affect the operation

- SIGNATURECAPTURE
- SIGIMAGETYPE
- CTLSIGLINE
- CNTSIGLINE

# **SIGNATURE\_EX** (Message Interface)

The following tables provide corresponding device UI interactions, detailed protocol information, including field descriptions and examples.


#### Note

Signature data gathered outside of a transaction is sent back only to the POS and not to the Point/PAYware Connect gateway or host.


#### **Device UI Required**

### Note

Neo device (M450) is being used to capture screenshots for the Device UI Requirement section.

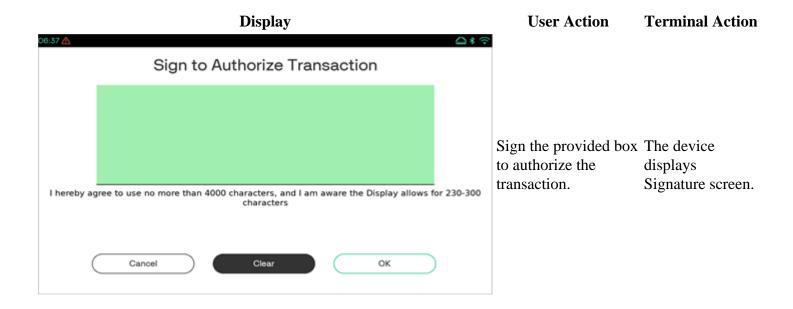

Display User Action Terminal Action

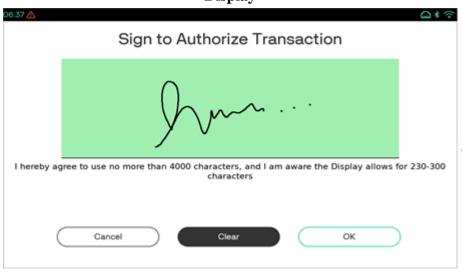

Press Enter to confirm.

The device displays Signature screen.

#### Request Packet

Field	Rule	Type	Minimum	Maximum	Value(s)	Description
FUNCTION_TYPE	Required	Static value	N/A	N/A	DEVICE	Type of function.
COMMAND	Required	Static value	N/A	N/A	SIGNATURE_EX	Command name.
DISPLAY_TEXT	Optional	Character	· 1	4000		Display text area allow of text to be displayed Engage devices have I text space available or <b>Example:</b> I Hereby A Pay The Amount in Fi

FORMATTED\_DISPLAY\_TEXT Optional Binary

0 Application does formatting of the display text.

1 Application Formatting the display expects

 POS to

perform the formatting and send it to the device.

Field	Rule	Type	Minimum	Maximum	Value(s)	Description
POS_RECON	Optional	Character	1	30		POS reconciliation. Por Reconciliation field to echoed back in respons POS. <b>Example:</b> Retail
CHECKBOX_REQ	Optional	Boolean	N/A	N/A	TRUE/FALSE or Yes/No or 0/1	Checkbox requiremen
CHECKBOX_LABEL	Optional	Character		4000		Text to be displayed we check box. If this field provided, display text default to what is in castiles label SIGNATURE_DISCI (I Agree To The Term Conditions.).
COUNTER	Required	Numeric	1	10		COUNTER is used fo given MAC label. Eac COUNTER should be than the last one. This to authenticate the PO <b>Example:</b> 100
MAC	Required	Base64 Encoded Data	N/A	N/A	N/A	Message Authentication Code. This is used to authenticate the POS.
MAC_LABEL	Required	Character	1	50		Associated label that t device which MAC_K use to decrypt the valu MAC. This is used to authenticate the POS. <b>Example:</b> REG1

### Example

Following is an example of request packet

#### Response Packet

Field	Type	Value	Description
RESPONSE_TEXT	Character		Processor response text. <b>Example:</b> Signature Captured
RESULT	Character		This indicates the Result details. <b>Example:</b> OK
RESULT_CODE	Numeric	Expected result code: -1, 59001, 59006, 59040	This indicates the result code. Refer to Result/Error Codes for details.
TERMINATION_STATUS	Character	SUCCESS or FAILURE	This indicates the transaction termination status. This is the overall status of the transaction irrespective of approved or declined. Like, if the output is generated then the status is SUCCESS and if no output is generated then the status will be FAILURE.
CHECKBOX_SEL	Character		If the checkbox is selected.
SIGNATUREDATA	Base 64 encoded data		Signature data.
MIME_TYPE	Character	Valid values:  • BMP  • TIFF  • 3BA  • PNG  • RAW	Mime type of the signature image. <b>Example:</b> Ex: image/png, image/bmp. <b>NOTE:</b> The response data for MIME_TYPE field is depending on the value set in SIGIMAGETYPE parameter (Application Parameters).
POS_RECON	Character		POS reconciliation field echoed back if sent in request. <b>Example:</b> RetailPOS1
COUNTER	Numeric		Echoes counter sent in the request. <b>Example:</b> 100

# **Transaction Performance Metric**

Note

These fields are returned, if SCAPERFMETRIC parameter (<u>Application Parameters</u>) is enabled.

Field	Type Value	Description
UI_TIME	Time	This indicates the time duration, for which the device screen is displayed (like error message, prompt screen, remove card screen) till any user action is performed in the command execution flow. This field is not applicable to capture the time for the Processing, Authorizing and transaction status screen. The format of the returned value would be S.sss, where S is seconds (this can be 0 to any positive integer) and sss is milliseconds. In case of any insignificant time or 0.000 value, will not be returned in the response. <b>Example:</b> <ui_time>44.028</ui_time>

### Field Type Value

### **Description**

**HOST TIME Time** 

This indicates the time taken for the Connection to the host, sending request and receives data from the host. This field also take the cumulative time for multiple requests which may sent to the host during the transaction including two legged transactions, timeout requests, Auto Last Tran requests, DCC, Credit app proxy. The format of the returned value would be S.sss, where S is seconds (this can be 0 to any positive integer) and sss is milliseconds. In case of any insignificant time or 0.000 value, will not be returned in the response. **Example:** <HOST\_TIME>1.389</HOST\_TIME>

CMD TIME Time

This field indicates the total amount of time for a command, which is executed by the application from request received to the response sent. The format of the returned value would be S.sss, where S is seconds (this can be 0 to any positive integer) and sss is milliseconds. In case of any insignificant time or 0.000 value, will not be returned in the response. **Example:** CMD\_TIME>70.765

#### Example

Following is an example of response packet

```
<RESPONSE>
```

<TERMINATION\_STATUS>SUCCESS</TERMINATION\_STATUS>

<COUNTER>1</COUNTER>

<RESULT CODE>-1</RESULT CODE>

<RESULT>OK</RESULT>

<RESPONSE\_TEXT>Signature Captured/RESPONSE\_TEXT>

<MIMETYPE>image/bmp</MIMETYPE>

<SIGNATUREDATA> {base64 encoded data} </SIGNATUREDATA>

</RESPONSE>