



BundleInfo Class Reference

Inheritance diagram for BundleInfo:

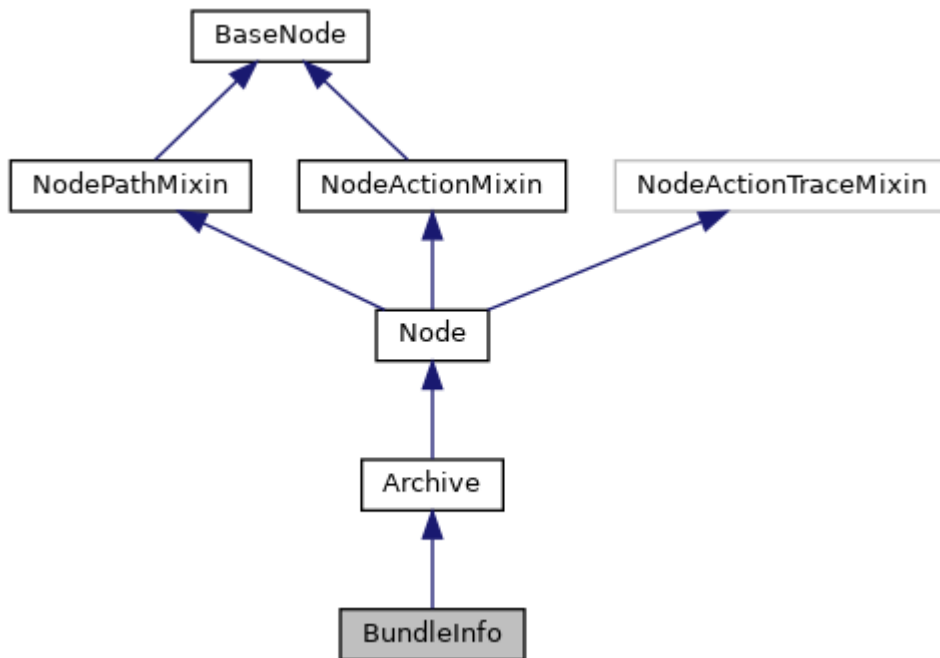

[\[legend\]](#)

Collaboration diagram for BundleInfo:

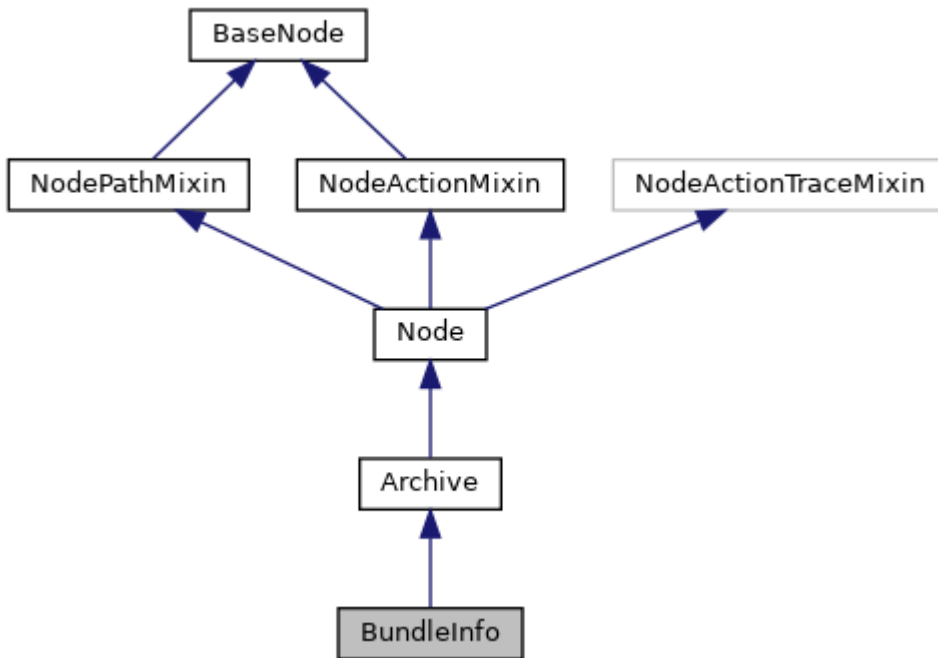

[\[legend\]](#)

Public Member Functions

def [__init__](#) (self, [platform](#))

def [changeset_node](#) (self)

def [manifest_node](#) (self)

def [get_base_name](#) (self)

► Public Member Functions inherited from [Archive](#)

def [control_node](#) (self)

def [control](#) (self)

def [set_signer](#) (self, signer_type)

► Public Member Functions inherited from [Node](#)

def [__init__](#) (self, [name](#)=None, [parent](#)=None, [tarinfo](#)=None)

► Public Member Functions inherited from [NodePathMixin](#)

def [get_path_nodes](#) (self, include_root=False, within_archive=False)

str [get_path](#) (self, include_root=False, within_archive=False)

Retrieve path of this node within the archive or withing whole tree of archives Separator '/' is used within archives and for recursion into archives. [More...](#)

int [get_depth](#) (self, within_archive=False)

Retrieve depth of node within the archive or within whole tree of archives. [More...](#)

def [find](#) (self, str node_path)

Find node according to node path provided. [More...](#)

def [find_re](#) (self, str node_path_re)

Find node according to regular expression node path provided Search will look for regex matching node name match along the path. [More...](#)

bool [has_ancestor](#) (self, ancestor)

Find if node has another node as ancestor. [More...](#)

► Public Member Functions inherited from [BaseNode](#)

str [get_type_str](#) (self)

Returns node type as string Supported are: "Package", "Bundle", "Dlfile", "Signature", "Control", "Manifest", "Dir", "File", "Symlink". [More...](#)

bool [is_csd](#) (self)

Test if node is a CSD. [More...](#)

bool [is_inf](#) (self)

Test if node is an INF. [More...](#)

bool [is_manifest](#) (self)

Test if node is a manifest. [More...](#)

bool [is_changeset](#) (self)

Test if node is a changeset. [More...](#)

bool [is_archive](#) (self)

Test if node is an archive. [More...](#)

bool [is_dlfile](#) (self)

Test if node is a dlfile. [More...](#)

bool [is_bundle](#) (self)

Test if node is a bundle. [More...](#)

bool [is_package](#) (self)

Test if node is a package. [More...](#)

bool [is_signature](#) (self)

Test if node is a signature. [More...](#)

bool [is_control](#) (self)

Test if node is a control. [More...](#)

def [mark_modified](#) (self)

def [get_parent_archive](#) (self)

Retrieve parent archive node. [More...](#)

def [get_platform](#) (self)

Retrieve platform for this node. [More...](#)

def [get_root_archive](#) (self)

Retrieve root archive node Root archive node has no parent archive. [More...](#)

int [get_index](#) (self)

Retrieve index of this node in the list of its parent's children. [More...](#)

def [get_signer](#) (self)

def [__str__](#) (self)

► Public Member Functions inherited from [NodeActionMixin](#)

def [unlink](#) (self)

Remove this node from tree. [More...](#)

def [destroy](#) (self)

Remove and destroy this node and all its children. [More...](#)

def [add_child](#) (self, child_node, index=None)

Add a child node. [More...](#)

def [create_dir](#) (self, dir_name)

Add a child directory If same child name exists, it will be replaced. [More...](#)

def [create_file](#) (self, file_name, content=b'')

Add a child file. [More...](#)

def [set_content](#) (self, content)

Set the content of this file node. [More...](#)

def [set_mode](#) (self, mode)

Set the mode of this file/directory. [More...](#)

def [copy](#) (self)

Make a deep copy of this node and its content, children and attributes. [More...](#)

def [move](#) (self, [parent](#))

Move this node to another parent. [More...](#)

def [rename](#) (self, newname)

Rename this node and underlying tarinfo name. [More...](#)

Static Public Member Functions

def [create](#) ([platform](#), base_name)

► Static Public Member Functions inherited from [Archive](#)

def [setup_archive](#) (archive, full_name)

► Static Public Member Functions inherited from [Node](#)

def [create_node](#) ([name](#), entry_type)

► Static Public Member Functions inherited from [BaseNode](#)

tarfile.TarInfo [create_tarinfo](#) (str tarinfo_name, entry_type)

Tarinfo creation helper. [More...](#)

Additional Inherited Members

► Data Fields inherited from [Archive](#)

[platform](#)

[tar](#)

[is_gzip](#)

[pax_headers_found](#)

[signer](#)

► Data Fields inherited from [BaseNode](#)

[name](#)

node name (str) [More...](#)

[parent](#)

parent node ([BaseNode](#)) [More...](#)

[children](#)

children of this node in order. [More...](#)

[tarinfo](#)

Tarinfo object containing the type of archive entry, path, user, group, permission, etc.

[More...](#)

[file_content](#)

Object representing the content of the file. [More...](#)

[signature_nodes](#)

Nodes holding signature of this node. [More...](#)

► Data Fields inherited from [NodeActionMixin](#)

[parent](#)

[children](#)

[file_content](#)

[name](#)

[signature_nodes](#)

Detailed Description

Represents a INF node (vos3)

Constructor & Destructor Documentation

[?](#) `__init__()`

```
def __init__( self,  
              platform  
            )
```

Reimplemented from [Archive](#).

Member Function Documentation

[?](#) `changeset_node()`

```
def changeset_node ( self )
```

? create()

```
def create ( platform,  
            base_name static  
            )
```

? get_base_name()

```
def get_base_name ( self )
```

? manifest_node()

```
def manifest_node ( self )
```

The documentation for this class was generated from the following file:

- sys/import/packman/packmanlib/[node.py](#)